

UNMATCHED
QUALITY
UNRIVALED
PERFORMANCE



PAKISTAN'S
GLOBAL
TYRE BRAND



Service Tyres (Private) Limited



www.servistyres.com | [f ServisTyres](#) | [ServisTyresOfficial](#) | [@ServisTyre](#) | [ServisTyresOfficial](#)

TRUSTED IN OVER 40 COUNTRIES

PRODUCT CATALOG



CONTENT

01 Company Profile

03 Vision & Mission

06 Motorcycle

29 Scooter

37 Bicycle

45 Rickshaw / Tuk Tuk

51 ULT / Loader

55 Trolley

59 Tractor

67 Tubes

72 Nozzles

SERVICE TYRES (PRIVATE) LIMITED

Service Industries Limited has attained an outstanding reputation in Pakistan's business community with over **50 years** of diversified experience. Over the years, our umbrella brand, Servis, has evolved as one of the finest brands in the country for footwear and tyres/tubes. Servis enjoys a reputable position in several countries where it operates. It has established its roots in four continents, i.e. **Asia, Africa, South America & Europe**, and is paving its way for further expansion. Its rich manufacturing and marketing experience of over 40 years in tyres/tubes and of over 50 years in footwear has enabled Servis to emerge on Pakistan's industrial and business landscape as an organization that is widely recognized for its pioneering role in the development of the industry. Its unwavering commitment to quality, its untiring R&D efforts, its highly innovative Its unwavering commitment to quality, relentless R&D efforts, innovative approach to manufacturing and marketing, unquenchable drive to adopt state-of-the-art technology, and persistent dedication to meeting the diverse needs and discerning tastes of customers keep it far ahead of its competitors. The excellence at SIL continues with the launch of 'Servis Genuine Parts' earlier in 2015. The idea is to leverage the extensive heritage of the Servis brand and capitalize on existing customer base of Servis by supplying them premium quality motorcycle spare parts nationwide. This brand extension is a step forward in integrating our business and reaching new heights in the auto industry.

Service Tyres (Private) Limited is listed on all the stock exchanges of the country. With a work-force of over **12,000 employees** and a turnover of approximately **US \$200 million** per annum, we are a low-cost producer, selling and growing profitably, doubling our sales every five years, and earning a fair profit for our shareholders.

Our growing portfolio of brands instills in us a sense of pride in being a nationwide network that touches millions of lives everyday. Servis today has a strong presence in Pakistan with over **10,000 retail/wholesale** outlets and a continuously growing international clientele. We are proud to be the undisputed market leaders in bicycle & motorcycle tyres in Pakistan for the **OEM** as well as the **replacement market**. We are the major supplier of tyres to **Japanese** motorcycle manufacturers like **HONDA, YAMAHA** and other local motorcycle assemblers in Pakistan. We are also producing wheel barrow and three wheeler tyres and tubes for foreign and domestic markets.

In 2019, Servis Group partnered with a leading tyre industry tycoon from China, Chaoyang Long March Tyre Co. Ltd. Together, we established Pakistan's first plant dedicated to the production of radial truck and bus tyres.

The wheels of Service Industries keep moving at all times owing to its adequate arrangements for maintaining an uninterrupted power supply. It has multiple tiers of alternative power generation comprising a power plant, generating power through diesel/gas generators. These arrangements enable it to ensure timely deliveries. We are determined to provide consumers with satisfaction through exceptional product quality, and to demonstrate that we are meeting our commercial goals in an unmatched manner.

**OUR
CONVICTION
IS THAT
PRESTIGE IS A
MERIT TO BE
EARNED**

OUR VISION

To become a
**GLOBAL,
WORLD CLASS**
and
DIVERSIFIED
company,
which leverages
its brands and
its people.

Setis

OUR MISSION

- To be a result-oriented and profitable company by consistently improving market share, quality, diversity, availability, presentation and customer acceptance.
- To emerge as a growth-oriented company that ensures optimum return and value addition to its shareholders.
- To ensure cost consciousness in decision-making and operations without compromising our commitment to quality.
- To create an efficient resource management and conducive business environment. To evolve an effective leadership by creating a highly professional and motivated management team fully equipped to meet any challenge.
- To keep abreast with modern technology and designs to optimize production and enhance brand image to attain international recognition for the company's products.
- To set up highly ethical business standards and be a good corporate citizen, contributing to the development of the national economy and assisting charitable causes.
- To adopt appropriate safety rules and environment-friendly policies.

Motorcycle TYRES



Servis motorcycle tyres cater to almost every possible use of a two wheeler. Its range of tyres can be used for street riding, sports, load-bearing and off-road riding.



Motorcycle TYRES

Runner

Made with high performance compound with extended shoulders for better road grip, efficient fuel consumption, water channeling and excellent grip while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
90/80-17 TL	6	3120gms ±7%	90	46 P	36	250
90/90-17 TL	6	3257gms ±7%	90	49 P	36	250
100/80-17 TL	6	3580gms ±7%	100	52 P	36	250
110/70-17 TL	6	4152gms ±7%	110	54 P	36	250
110/80-17 TL	6	4260gms ±7%	110	57 P	36	250
140/70-17 TL	6	5490gms ±7%	140	66 P	36	250
90/90-18 TL	6	4000gms ±7%	90	51 P	33	225
100/90-18 TL	6	4500gms ±7%	100	51 P	33	230
2.50-17 TL	6	2654gms ±7%	66	43 P	41	280
130/70-17 TL	6	4985gms ±7%	130	62 S	36	250
120/70-17 TL	6	4246gms ±7%	120	58 S	36	250
2.75-18 TL	6	3100gms ±7%	76	48 P	41	280
120/80-16 TL	6	4597gms ±7%	120	60 P	32	225



07

ALPHA

The directional and aggressive block design, featuring extra dimples, provides improved stability, excellent traction on highways, and enhanced grip in wet conditions.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-17 TL	6	2900gms ±7%	76	47 P	40	280
3.00-17 TL	6	3365gms ±7%	82	50 P	40	280
2.75-18 TL	6	3035gms ±7%	76	48 P	40	280
3.00-18 TL	6	3710gms ±7%	82	52 P	40	280
90/90-18 TL	6	3710gms ±7%	90	51 P	33	225



Motorcycle TYRES

CRUISER

The rear tyre features a unique tread design with grooves and shoulder buttons, along with wider and extended shoulders, This combination ensures comfortable riding, enhanced durability, superior road grip, and improved resistance to aquaplaning.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
80/100-14	6	2695gms ±7%	80	40 P	33	225
70/90-17 R	6	2270gms ±7%	70	40 P	40	275
70/90-18 R	6	2455gms ±7%	70	40 P	40	275
90/90-17 R	6	3030gms ±7%	90	50 P	40	275
90/90-18 R	6	3480gms ±7%	90	51 S	35	241



08

NITRO 1

This range of tubeless and tube-type tyres is specifically designed for a stable, high-speed ride. Bold slanted blocks ensure effective water dispersion and provide enhanced grip during braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17 TL	8	2315gms ±7%	64	48 P	40	275
100/90-17	6	4100gms ±7%	100	55 P	33	225
100/90-17 TL	6	4270gms ±7%	100	55 P	33	225
100/90-18 TL	6	4630gms ±7%	100	56 P	33	230
90/90-18 TL	6	4000gms ±7%	90	51 P	33	225
110/90-18 TL	6	5255 gms ±7%	110	59 P	33	225
2.50-18 TL	6	2525gms ±7%	66	45 P	33	225
70/90-17 TL	6	2344gms ±7%	70	38 P	33	225



ACE

The solid lug profile is designed to deliver maximum stability and grip for both on-road and off-road riding. Slanted horizontal grooves ensure excellent water dispersion, enhancing wet grip for a safer ride.



Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
80/90-21 TL	6	3516gms ±7%	80	48 H	41	280
90/90-19 TL	6	4341gms ±7%	90	52 P	33	225
110/80-18 TL	6	4330gms ±7%	110	58 S	41	280
110/90-17 TL	6	5345gms ±7%	110	60 P	33	225
120/90-17 TL	6	5750gms ±7%	120	64 S	36	250
120/80-18 TL	6	5580gms ±7%	120	62 S	33	225
2.75-18 TL	6	3099gms ±7%	76	48 P	41	280
90/90-18 TL	6	3770gms ±7%	90	51 P	33	225

ADVENT

The classic block tread design is an adaptation of the famous Longlife series. While it is comparatively larger than other tyres; another distinguishing factor is its more load tolerance.



Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-16	6	3230gms ±7%	94	58 P	33	230

ALPHA

Directional and aggressive block design with extra dimples, provides better stability, good traction on highways and enhanced wet grip.



Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-17 TL	6	2900gms ±7%	76	47 P	40	280
3.00-17 TL	6	3365gms ±7%	82	50 P	40	280
2.75-18 TL	6	3035gms ±7%	76	48 P	40	280
3.00-18 TL	6	3710gms ±7%	82	52 P	40	280
90/90-18 TL	6	3710gms ±7%	90	51 P	33	225

ARIANA

The bold block tread is designed to perform exceptionally in on-road and off-road conditions. Excellent water channeling ability ensures improved grip in all weather conditions.



Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-14	6	2250gms ±7%	76	34 P	33	225

ASPIRE

Thick block profile is specially designed for stability and grip in speed riding conditions. This pattern has brilliant water repulsion and cornering ability.



Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/80-17 TL	6	4880gms ±7%	120	61 S	36	250

BATTLE MAX

The classic block tread design, derived from Servis Tyres' renowned Longlife brand, boasts a rich history of rider trust, offering exceptional road grip, comfort, and durability.



Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
110/100-18	6	5897gms ±7%	110	64 M	32	225
3.00-18 TL	6	3523gms ±7%	82	52 P	32	225

CHALLENGER

Multiblock design for poor road conditions provides stability and maneuverability.



Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17	8	2255gms ±7%	65	48 P	40	275



Motorcycle TYRES



CHAMP

This bold block front design is a diversion from the usual front tyre treads. It features two parallel grooves across the diameter providing easy steering capability and comfortable ride while big blocks on the sides ensure added stability when cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.25-17 F	6	1515gms ±7%	62	33 L	32	220



CHAMPION

With its central groove, this tyre offers increased speed capability without compromising grip, thanks to the larger blocks on the shoulders. This block design not only ensures stability during vector drive but also enhances grip while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
110/90-16 TL	6	5010gms ±7%	110	59 P	33	225



CHARGER M+S

Modern and stylish tread, specially designed for mud and snow.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-18 TL	6	3305gms ±7%	80	48 P	36	280
90/90-18 TL	6	3695gms ±7%	90	57 P	40	280



CHEETAH FRONT

Available in complete range of 17" and 18" front tyres, this parallel line tread design ensures excellent steering. Multiple parallel grooves ensure road grip, water dispersion and stability especially while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.25-17 F	6	1515gms ±7%	62	37 L	45	310
2.50-18 F	6	1845gms ±7%	66	48 P	45	310
2.75-17 F	6	2260gms ±7%	76	47 P	40	280
2.75-18 F	6	2325gms ±7%	76	42 P	33	227

Motorcycle TYRES



CHEETAH REAR

It is one of Servis Tyres' most popular tread profiles. The Cheetah features a classic block design with a central block line for a smooth ride and easy maneuvering. Special smaller blocks on the shoulders enhance grip while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17 R	6	2035gms ±7%	66	42 P	45	310
2.50-18 R	6	2115gms ±7%	66	48 P	45	310
2.75-18 R	6	2405gms ±7%	76	50 P	50	345
3.00-17 R	6	2670gms ±7%	84	45 P	32	220
3.00-18 R	6	2811gms ±7%	82	52 P	40	276



COBRA

This big block design is particularly suitable for long drives as it provides better stability and improved braking on higher speed.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
90/90-18 TL	6	3710gms ±7%	90	51 P	33	225



CLASSIC

This sleek flatter profile provides great stability and ride comfort in both dry and wet conditions.


Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-18 TL	6	5355gms ±7%	109	60 P	33	225



CLASSIC

This sleek flatter profile provides great stability and ride comfort in both dry and wet conditions.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
50/100-17	4	1265gms ±7%	50	23 J	33	230

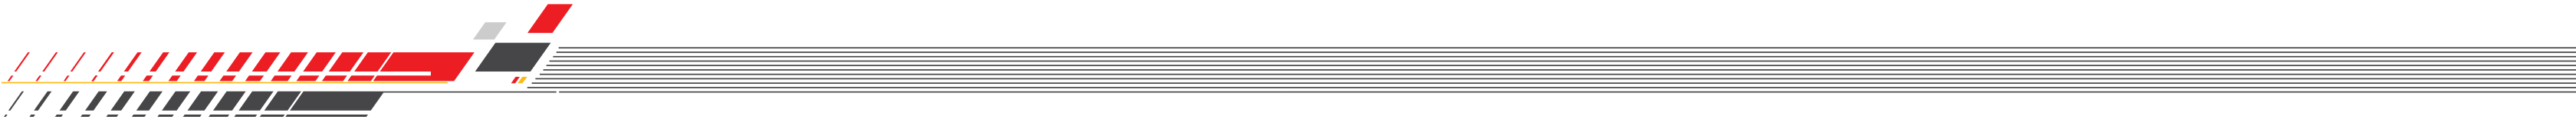



Motorcycle TYRES

CRUISER



This range of sizes features a central line design for a more comfortable vector ride while big block design on shoulders ensures road grip while braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
80/100-14	6	2695gms ±7%	80	40 P	33	225
70/90-17 R	6	2270gms ±7%	70	40 P	40	275
70/90-18 R	6	2455gms ±7%	70	40 P	40	275
90/90-17 R	6	3030gms ±7%	90	50 P	40	275
90/90-18 R	6	3480gms ±7%	90	51 P	35	241

CRUISER NEW



This profile features more grooves on large blocks intended to provide maximum grip. The central line design is for maximum performance in vector ride.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
100/90-18	6	4320gms ±7%	100	56 P	33	225

DOLPHIN



Newly introduced high speed tyres are carefully designed to perform exceptionally in terms of road grip and stability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-17 TL	6	4550gms ±7%	120	58 H	41	280
160/60-17 TL	6	6550gms ±7%	160	69 H	41	280

DRAGON HD



The interwoven larger blocks of Dragon HD make it very stable. Smaller blocks on the shoulder provide extra grip while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17	8	2160gms ±7%	65	48 P	40	275

DRIFTER



This profile provides ride stability on vector ride and additional grip on braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-18 TL	6	4540gms ±7%	95	56 P	33	230

DURA GRIP



Dura Grip features big blocks and more pattern depth to improve performance in poor road conditions. Specially developed compound enhances tyre life while block design provides enhanced grip and braking capability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-17 TT	6	3410gms ±7%	82	50 P	40	275
3.00-18 TT	6	3185gms ±7%	82	50 P	40	280
110/90-16 TL	6	5188gms ±7%	110	65 P	41	280
3.00-18 TL	6	3605gms ±7%	80	52 P	41	280
3.25-18 TL	6	4045gms ±7%	90	59 P	41	280
3.50-18 TL	6	4595gms ±7%	93	62 P	41	280

EURO HD



Its rectangular blocks provide maximum ride stability and water repulsion.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17	8	2040gms ±7%	65	48 P	40	275

FIGHTER HD



Cross blocks provide a bigger surface area improving grip and stability. While shoulder blocks provide extra support on corners.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17	8	2255gms ±7%	65	48 P	40	275



Motorcycle TYRES



FLASH

A combination of mirrored blocks, this design is for riders who prefer enhanced road grip and ride stability. Smaller blocks on the shoulders provide additional grip on corners.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-17 TL	6	3530gms $\pm$ 7%	82	50 P	40	280
3.00-18	6	3835gms $\pm$ 7%	82	52 P	40	280



GRAND HD

This 8 PR tyre is designed for load-bearing. It features a flat profile for maximum surface contact. This pattern is inspired by truck tyres giving it extraordinary load-bearing ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17	8	2305gms $\pm$ 7%	65	48 P	40	275



GRIPPER

This range of sizes is specifically designed for improved stability, grip and cornering ability for street motorcycles. Diamond patterns on centralized block pattern exponentially enhance the road grip. Side blocks provide extra support for braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17	6	2140gms $\pm$ 7%	66	43 P	40	275
3.00-17	6	2945gms $\pm$ 7%	84	40 P	40	275
3.00-18	6	3295gms $\pm$ 7%	84	51 S	35	240



HI-GRIP +

Hi Grip+ is designed as an adaptation of our famous Hi Speed pattern. This adapted pattern provides smoother rides and enhanced riding comfort.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-17 TT	6	3465gms $\pm$ 7%	82	50 P	40	275



HI-SPEED

It is part of a range considered among Servis Tyres' classics. This tread design is specifically engineered for a smoother ride and enhanced grip when cornering, made possible by its optimal load tolerance relative to tyre weight.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.25-17 F	6	1610gms $\pm$ 7%	62	33 L	40	275



HI-SPEED

Considered to be a classic among the range of bjrrs offered by Servis Tyres, this tread design is specifically for a smoother ride and enhanced grip when cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17 R	6	1985gms $\pm$ 7%	66	43 P	40	275
2.50-18 R	6	1970gms $\pm$ 7%	66	45 P	40	275
3.00-17 R	6	2770gms $\pm$ 7%	84	50 P	40	275



INSIGNIA

Designed for poor road conditions, this profile has a more concentrated block pattern for more stability.


Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-18 TL	6	4760gms $\pm$ 7%	94	56 P	33	225



INSTINCT

This tread profile consists of big blocks with sharp grooves. Designed for high-speed rides, this design ensures road grip on braking. Special high-performance compound gives it additional grip on braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
100/80-17 TL	6	3530gms $\pm$ 7%	100	52 P	33	225
130/70-17 TL	6	4880gms $\pm$ 7%	130	62 P	36	250

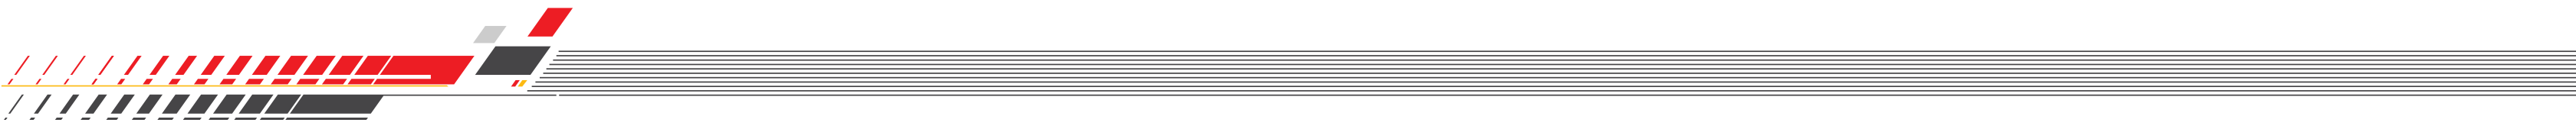



Motorcycle TYRES



LOADER

This 8 ply range of sizes is a special design for commercial street bikes. The inspiration for this tread has been taken from trailer tyre patterns. This tough tyre is known for its enhanced endurance for motorcycles which are used for carrying or pulling load.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17	8	2350gms ±7%	65	43 P	40	280
2.50-18	8	2485gms ±7%	65	45 P	45	300
3.00-17	8	3255gms ±7%	80	50 P	40	280



LONGLIFE

Part of the Longlife family, this adaptation maximizes ride efficiency, road grip and life span of the tyre.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-18 R	6	2715gms ±7%	82	50 P	35	240



LONGLIFE NEW

With a centralized groove line, this adaptation of the classic Servis Longlife provides more riding comfort along with enhanced speed characteristics and easier turning ability without compromising grip while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-16	6	2600gms ±7%	82	48 P	40	280



LONGLIFE +

An adaptation of Longlife Front, this profile provides a smoother riding experience and enhanced steering ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-18 TL	6	2980gms ±7%	78	42 P	33	225



LONGLIFE FRONT

Multiple block line front pattern provides extra grip and comfortable steering ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-18 F	6	2405gms ±7%	76	42 P	33	230



LONGLIFE FRONT 4

This front tyre features improved speeding capability and steering comfort. Multi grooved parallel channels ensure water dispersion and road grip.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.25-17 F	4	1515gms ±7%	62	32 L	32	220
2.50-17 F	4	1750gms ±7%	66	38 L	32	220
2.50-18 F	4	1825gms ±7%	66	38 P	32	220



LONGLIFE REAR 2

Part of the Longlife family, this adaptation maximizes ride efficiency, road grip and life span of the tyre.


Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-17 R	6	2715gms ±7%	82	50 P	40	275



LONGLIFE REAR 4

This classic tread of Longlife range is time tested for its excellent road grip and lesser abrasion. The longer life span of this design provides excellent value for money for everyday street motorcycle riding.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.25-17 R	4	1515gms ±7%	62	33 L	32	220
2.50-17 R	4	1745gms ±7%	66	38 L	32	220
2.50-18 R	4	1825gms ±7%	66	48 P	32	220
2.75-17 R	6	2270gms ±7%	76	42 P	32	220

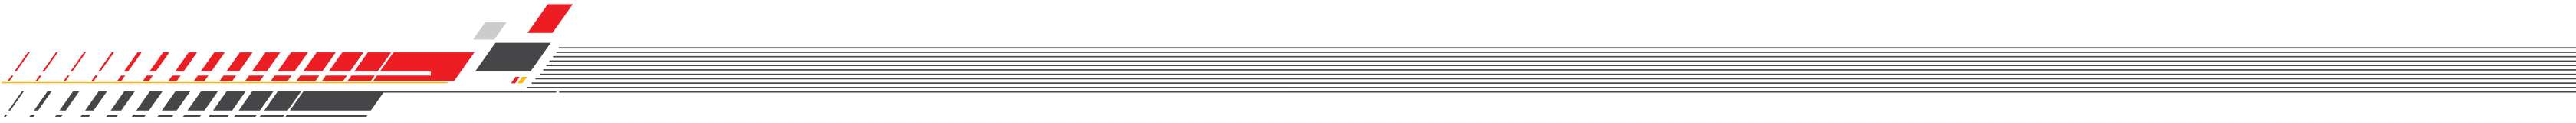



Motorcycle TYRES



MARATHON

Belonging to the Street bike range, this adaption optimizes tyre ride, grip, and lifespan.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.25-17	6	1605gms ±7%	62	38 L	32	220
2.75-18	6	2955gms ±7%	76	48 P	41	280
80/100-14	6	2381gms ±7%	80	49 P	41	280
90/90-18	6	3482gms ±7%	90	57 P	41	280



MAX GRIP

Max Grip is designed for stable rides in the city streets. This profile features excellent road grip and water dispersion character.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
110/70-16 TL	6	3525gms ±7%	110	52 P	32	220
130/70-16 TL	6	5020gms ±7%	130	61 P	32	220



MATE

Thick block profile is specially designed for stability and grip in speed riding conditions. This pattern has brilliant water repulsion and cornering ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.60-19 TT	4	4098gms ±7%	93	57 P	36	250
4.10-18 TT	4	4740gms ±7%	109	60 P	33	225



MOTOCROSS

This front rear pair of tyres is an adaption of classic motocross design to recreate the vintage look with added benefits of better stability, strength and longer life.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.25-19 TL	6	4055gms ±7%	89	54 S	33	225
3.25-19 TT	6	3645gms ±7%	89	54S	33	225



MOTOCROSS

This front-rear tyre pair adapts the classic motocross design for a vintage appearance, delivering improved stability, strength, and longevity.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-19 TL	6	4945gms ±7%	94	57 S	36	250
3.50-19 TT	6	4535gms ±7%	94	57S	36	250



MOTOCROSS

Especially designed for off-road adventure bikers to provide maximum traction in off-road conditions. The tyre features an optimum combination of stability, flexibility and strength.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.10-18 TL	6	4360gms ±7%	109	60 P	33	225



MOTOCROSS

Especially designed for off-road adventure bikers to provide maximum traction in off-road conditions. The tyre features an optimum combination of stability, flexibility and strength.


Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-21 TL	6	3710gms ±7%	76	45 P	33	225



NITRO

This centrally grooved design provides stability and comfortable steering in vector ride, while blocks on the shoulders provide necessary grip while braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
70/90-17	6	1950gms ±7%	70	38 P	33	225

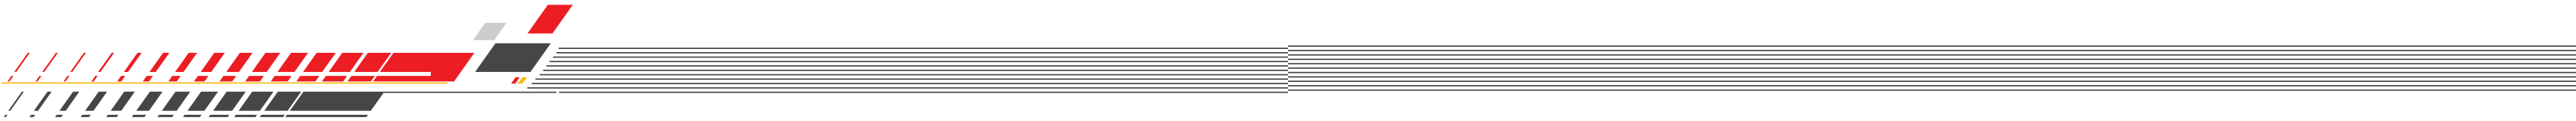

Motorcycle TYRES



NITRO

The centrally grooved design ensures stability and comfortable vector steering, while shoulder blocks offer essential grip during braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
90/90-18	6	3480gms ±7%	90	51 P	36	250

NITRO 1

This range of tubeless and tube type sizes is specifically designed for a stable speedy ride. Bold slanted blocks ensure water dispersion and enhanced grip while braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17	8	2250gms ±7%	64	48 P	40	275
100/90-17	6	4100gms ±7%	100	55 P	33	225
100/90-17 TL	6	4342gms ±7%	100	55 P	33	225
100/90-18 TL	6	4630gms ±7%	100	56 P	33	230
90/90-18 TL	6	4000gms ±7%	90	51 P	33	225
110/90-18 TL	6	5255gms ±7%	110	59 P	33	225
2.50-18 TL	6	2525gms ±7%	66	45 P	33	225
70/90-17 TL	6	2344gms ±7%	70	38 P	33	225

NITRO 2

This design features an angled groove in the centre ensuring smooth vector ride, while slanted grooves on the sides provide water dispersion capability along with braking ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
80/90-17 TL	6	2880gms ±7%	80	38 P	33	225
70/90-17	6	2150gms ±7%	70	38 P	33	225
70/90-17 TL	6	2450gms ±7%	70	38 P	33	225

NITRO 3

With a straight central groove and highly slanted shoulder grooves, this tread is designed for high-speed rides. It features excellent water dispersion ability, along with high-performance compound to ensure road grip on braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
110/70-17	6	3415gms ±7%	110	54 S	36	250

Motorcycle TYRES



RAPID

Bigger blocks with extra lines provide more grip while braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-18 TL	6	3135gms ±7%	76	48 P	41	280
3.00-18 TL	6	4068gms ±7%	82	52 P	41	280

RAVO

This range of multiple sizes is an adaptation of off-road motocross patterns for everyday use motorcycles providing improved grip and stability in poor road conditions. Deeper tread and softer compound ensure enhanced road grip on on-road and off-road conditions with greater stability and braking power.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.25-17	6	1655gms ±7%	62	33 L	33	225
2.50-17	6	2265gms ±7%	66	42 P	45	310
2.75-17	6	2685gms ±7%	76	47 P	40	280
3.00-17	6	2929gms ±7%	82	50 P	40	250
110/90-17	6	4390gms ±7%	110	60 P	36	250
2.50-18	6	2375gms ±7%	66	42 P	45	310
2.75-18	6	2765gms ±7%	76	48 P	40	280
3.00-18	6	3090gms ±7%	82	52 P	40	280
80/100-17	6	3180gms ±7%	80	55 P	40	280
90/90-18	6	3770gms ±7%	90	51 P	33	225

RAVO +

Adaptation of classic Ravo, this pattern is designed for poor road conditions. It provides more grip and stability owing to a specially designed compound.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-18 TL	6	3655gms ±7%	82	42 P	33	225
3.00-18 TL	6	3785gms ±7%	82	52 P	33	225
80/90-17 TL	6	2880gms ±7%	80	44 P	33	225
90/90-17 TL	6	3432gms ±7%	90	49 P	33	225

REVOLUTION

With its bold block pattern, this tyre is designed for excellent road grip and enhanced braking capability. Special block design on the edges improves stability while cornering. Slanted grooves show excellent water dispersion capability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
110/90-16 TL	6	5010gms ±7%	110	59 P	33	225



Motorcycle TYRES



RIDE ON

A thick block pattern for maximum grip and water repulsion for a safer and comfortable ride.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
90/90-17 TL	6	3770gms ±7%	90	49 P	33	225



ROAD GRIP

Featuring the tread design to maximize road grip and stability for street bikes, this pattern optimizes the benefits of better riding experience and less wear.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2 ¼-17 TT	4	1455gms ±7%	52	39 B	40	275



ROVER

A more streamlined pattern to enhance performance in vector ride, it provides a smooth and stable ride.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-18 TL	6	3350gms ±7%	82	52 P	41	283

RUNNER

Made with high performance compound with extended shoulders for better road grip, efficient fuel consumption, water channeling and excellent grip while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
90/80-17 TL	6	3120gms ±7%	90	46 P	36	250
90/90-17 TL	6	3257gms ±7%	90	49 P	36	250
100/80-17 TL	6	3580gms ±7%	100	52 P	36	250
110/70-17 TL	6	4152gms ±7%	110	54 P	36	250
110/80-17 TL	6	4260gms ±7%	110	57 P	36	250
140/70-17 TL	6	5490gms ±7%	140	66 P	36	250
90/90-18 TL	6	4000gms ±7%	90	51 P	33	225
100/90-18 TL	6	4500gms ±7%	100	51 P	33	230
2.50-17 TL	6	2654gms ±7%	66	43 P	41	280
130/70-17 TL	6	4985gms ±7%	130	62 S	36	250
120/70-17 TL	6	4246gms ±7%	120	58 S	36	250
2.75-18 TL	6	3100gms ±7%	76	48 P	41	280
120/80-16 TL	6	4597gms ±7%	120	60 P	32	225

Motorcycle TYRES



SAVER

This design is an adaptation of classic treads like Long-life and Cheetah, Featuring the same long-lasting compound, this pattern offers enhanced durability and performance.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17 R	6	2130gms ±7%	66	45 L	40	275



SPEEDO

This classic front pattern provides great steering ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-18 TL	6	2760gms ±7%	78	48 P	41	283
3.00-17 TL	6	3090gms ±7%	80	50 P	40	280
3.00-18 TL	6	3315gms ±7%	80	52 P	41	280



STORM

The classic motocross pattern is designed for an off-road experience. Provides extraordinary grip in muddy conditions.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-18 TL	6	3890gms ±7%	82	52 P	33	225



SUPER SONIC

This directional tread design gives excellent grip and riding stability. The central array of blocks provides minimum contact surface for speedy rides, while shoulder blocks provide excellent grip on braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17 R	6	2130gms ±7%	66	43 P	40	275
130/80-17 TL	6	5960gms ±7%	130	65 S	33	230



Motorcycle TYRES

Motorcycle TYRES



SUPER TRAIL

Based on off-road motocross pattern, this design is a part of the family of tyres designed for poor road conditions. Evenly spread block design provides excellent grip on on-road and off-road conditions and ensures a stable ride.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17	6	2045gms ±7%	66	45 P	45	310
2.50-18	6	2190gms ±7%	66	45 P	45	310
3.00-17	6	2645gms ±7%	84	50 P	32	220



VELOCITY

Bold tread sliced in multiple directions enhances water dispersion and improved braking ability. Special compound enhances the road grip for a more comfortable and safer ride.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
70/90-14	6	1510gms ±7%	70	34 P	33	225



TOP GEAR

Specially designed for high performance, this tyre gives a smooth ride experience on high speeds. Combination of aesthetically designed grooves ensures water dispersion and specially designed compound ensures enhanced road grip on braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-17 TL	6	4665gms ±7%	120	58 P	33	230
130/70-17 TL	6	4765gms ±7%	130	62 P	36	250



VELOCITY PLUS

Available in tubeless and tubed type versions, this tyre is designed for a smoother ride. Equidistant grooves provide excellent water dispersion capability while smaller grooves provide additional grip while braking. Shoulder tread enhances the grip while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
80/90-14	6	2285gms ±7%	80	40 P	33	225
80/90-14 TL	6	2575gms ±7%	80	40 P	33	225
90/90-14 TL	6	3380gms ±7%	90	46 P	33	225



TURBO

This bold directional adaptation of front tyre is specially designed for extraordinary wet performance and maximum efficiency on vector ride.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-18 F	6	2115gms ±7%	66	45 P	41	280
2.75-18 F	6	3215gms ±7%	76	44 P	32	221



VELOCITY 1

Available in tubeless and tubed type versions, this tyre is designed for better speed performance. Slanted grooves improve water dispersion along with providing enhanced stability while braking and cornering. Special low abrasion compound ensures long life of the tyre.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
80/90-16 TL	6	2917gms ±7%	80	43 P	33	225
90/90-14	6	2885gms ±7%	90	46 P	33	225
90/90-14 TL	6	3205gms ±7%	90	46 P	33	225
100/90-14 TL	6	3925gms ±7%	100	51 P	33	225



TURBO +

This tubeless directional front tyre features a directional tread with multiple grooves enhancing the grip and improving water channelling. This design provides comfortable steering in a vector ride and excellent grip while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.75-17 TL	6	3135gms ±7%	76	47 P	40	280




VIGO

Vigo features directional block patterns with multi-sized blocks in the centre and larger solid blocks on the sides. The blocked perimeter in the centre provides stability and grip during vector rides, while the shoulder blocks enhance the tyre's braking and cornering ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17 R	6	2140gms ±7%	66	43 P	40	275
3.00-17 R	6	2945gms ±7%	84	50 P	40	275

Motorcycle TYRES

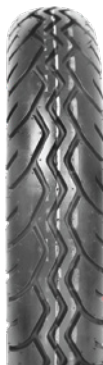

VISTA

Designed for a combination of smoother and stable ride, with enhanced cornering ability and braking performance.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
90/90-18 TL	6	3450gms $\pm 7\%$	90	51 P	33	228



VOGUE

This lean profile with central groove gives it excellent ability to perform on high speed. Grooves on the body and shoulders provide water repulsion and cornering ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
100/80-16 TL	6	3735gms $\pm 7\%$	100	50 S	36	250
120/80-16 TL	6	5265gms $\pm 7\%$	120	60 S	32	225
110/70-16 TL	6	3550gms $\pm 7\%$	110	54 S	36	250
140/60-16 TL	6	5545gms $\pm 7\%$	140	63 S	41	280



WARRIOR

Specially designed for high performance, this tyre gives a smooth ride experience on high speeds. Combination of aesthetically designed grooves serves water dispersion and specially designed compound ensures enhanced road grip on braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.25-16 TL	6	3990gms $\pm 7\%$	92	58 P	32	225



WINNER

This design features a knitted block pattern giving it improved road grip and ride stability. Featuring alternation of diamond patterns and small grooves on its shoulder blocks, this tyre provides extra grip on corners.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
2.50-17 R	6	2140gms $\pm 7\%$	66	43 P	40	275
2.75-17 TL	6	2960gms $\pm 7\%$	76	41 P	33	225
3.00-17 R	6	2945gms $\pm 7\%$	84	50 P	40	275



Motorcycle TYRES

Scooter TYRES



29

Servis scooter tyres that provide stability and ensure safety, are renowned the world over for quality and performance.

Instinct TYRES

INSTINCT

This tread profile consists of big blocks with sharp grooves. Designed for high speed rides, this block design ensures road grip on braking. Special high performance compound gives it additional grip on braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-12 TL	6	3620gms $\pm 7\%$	120	51 L	33	230
130/70-12 TL	6	3720gms $\pm 7\%$	130	56 L	33	230



STALLION

Specially designed for high speed performance, this pattern features smooth contact surface in the middle to ensure stability and steering capability. Diamond pattern on shoulders provide extra drag while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-12 TL	6	2805gms $\pm 7\%$	120	51 L	33	230
130/70-12 TL	6	3400gms $\pm 7\%$	130	56 L	33	230

30

Ultima

Ultima's round profile, directional tread with extended shoulder and special compound ensures good maneuverability, better stability, along with sharp cornering capability and wet traction.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-10 TL	6	2895gms $\pm 7\%$	120	48 J	32	220
120/70-12 TL	6	3265gms $\pm 7\%$	120	51 J	33	225
100/80-10 TL	6	2585gms $\pm 7\%$	100	53 J	36	248





Scooter TYRES



CHARGER M + S

This pattern is specially designed for maximum road grip. Bigger blocks provide stability while line patterns on the block contribute to excellent braking capability. Shoulder blocks ensure stability and extra drag while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-10 TL	6	2550gms ±7%	94	59 J	47	325
90/90-12 TL	6	2650gms ±7%	90	54 J	36	250



ETERNITY

Featuring a large block pattern with a smooth surface in the centre and a rough surface at the edges, this profile is designed for comfort and stability during vector rides, as well as enhanced traction while braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
130/70-12 TL	6	3810gms ±7%	130	56 L	33	230



FRICTION

Featuring a large block pattern with a smooth surface in the centre and a rough surface at the edges, this profile is designed for comfort and stability during vector rides as well as enhanced traction while braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-12 TL	6	3400gms ±7%	120	51 L	33	230



GRAVITY

The multiblock profile features deeper grooves, maximizing grip and water dispersion. Special shoulder blocks enhance cornering ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-10 TL	6	1940gms ±7%	82	44 J	36	250

Scooter TYRES



INSTINCT

This tread profile consists of big blocks with sharp grooves. Designed for high speed rides, this block design ensures road grip on braking. Special high performance compound gives it additional grip on braking and cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-12 TL	6	3620gms ±7%	120	51 L	33	230
130/70-12 TL	6	3720gms ±7%	130	56 L	33	230



LL-SCOOTER

This multiblock design ensures maximum grip and riding stability along with excellent water repulsion capability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-8	6	2000gms ±7%	93	51 J	35	242
3.50-10	6	2185gms ±7%	93	51 J	35	242



LL-XP

This wide block design increases road contact area resulting in enhanced ride stability and improved braking capability. Cross grooves increase water channeling in wet conditions.


Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
130/60-13 TL	4	3000gms ±7%	130	53 J	33	230
3.50-10 XP	6	2375gms ±7%	94	51 J	36	250



NAVIGATOR

This profile offers maximum road contact with small lines to improve braking capability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-10	6	2405gms ±7%	94	51 J	36	250
3.50-10 TL	6	2650gms ±7%	94	51 J	36	250

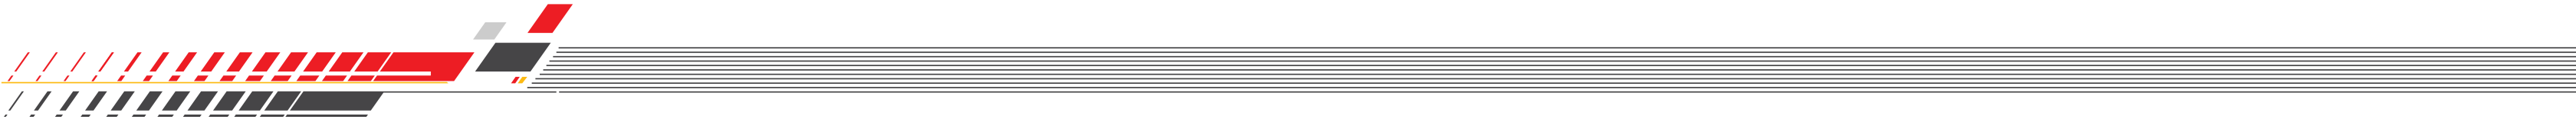



Scooter

TYRES



NITRO HD

This profile offers a smooth and stable ride with maximum steering comfortability. Extra grooves provide excellent water dispersion.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
90/100-10 TL	6	2605gms ±7%	90	53 J	36	250
3.50-10 TL	6	2605gms ±7%	94	53 J	36	250



OCTAVO

The multiblock profile features meshed blocks with deeper grooves, maximizing grip and water dispersion. Special shoulder blocks enhance cornering ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
90/90-12 TL	6	2735gms ±7%	90	44 J	25	175



PRIDE

This profile offers a smooth and stable ride with maximum steering comfortability. Extra grooves provide excellent water dispersion.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
80/90-10 TL	6	1968gms ±7%	80	44 J	36	250



RACER

The multiblock profile showcases interlocked blocks with deeper grooves, optimizing grip and water dispersal, while specialized shoulder blocks improve cornering performance.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-10 TL	6	1992gms ±7%	80	44 J	36	250
3.50-10 TL	6	2658gms ±7%	92	51 J	36	250

Scooter

TYRES



RITZ

This profile offers a smooth and stable ride with maximum steering comfortability. Extra grooves provide excellent water dispersion.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
100/90-10 TL	6	2925gms ±7%	100	56 J	36	250
90/90-12 TL	6	2735gms ±7%	90	44 J	25	175



STALLION

Specially designed for high speed performance, this pattern features smooth surface contact in the middle to ensure stability and steering capability. Diamond pattern on shoulders provides extra drag while cornering.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-12 TL	6	2805gms ±7%	120	51 L	33	230
130/70-12 TL	6	3400gms ±7%	130	56 L	33	230



SPIKE

Featuring bold block design, Spike provides excellent road grip and braking ability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-10 TL	6	2360gms ±7%	94	51 J	36	250



THUNDER

This sleek profile is designed for high-speed riding without compromising road grip and cornering ability owing to multiple grooves and blocks at its shoulders.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
130/70-12 TL	6	3610gms ±7%	130	62 P	40	280



Scooter TYRES



TORNADO

Tornado's bold directional design targets extreme wet traction and vector ride efficiency.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
110/70-13 TL	6	3347gms ±7%	110	48 P	33	230
130/70-13 TL	6	4480gms ±7%	130	57 P	33	230



ULTIMA

This profile provides the ultimate riding comfort and stability. Wider grooves provide improved water dispersion.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-10 TL	6	2895gms ±7%	120	48 J	32	220
120/70-12 TL	6	3265gms ±7%	120	51 J	33	225
100/80-10 TL	6	2585gms ±7%	100	53 J	36	248



VIGOUR

This tyre features a flatter profile for maximizing surface contact resulting in enhanced stability and road grip.


Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
120/70-12 TL	6	3360gms ±7%	120	58 P	40	280



ZAPPER

Zapper profile is designed for maximum road contact and stability. Slanted grooves provide excellent water dispersion in wet conditions.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-10 TL	6	2405gms ±7%	94	51 J	36	250

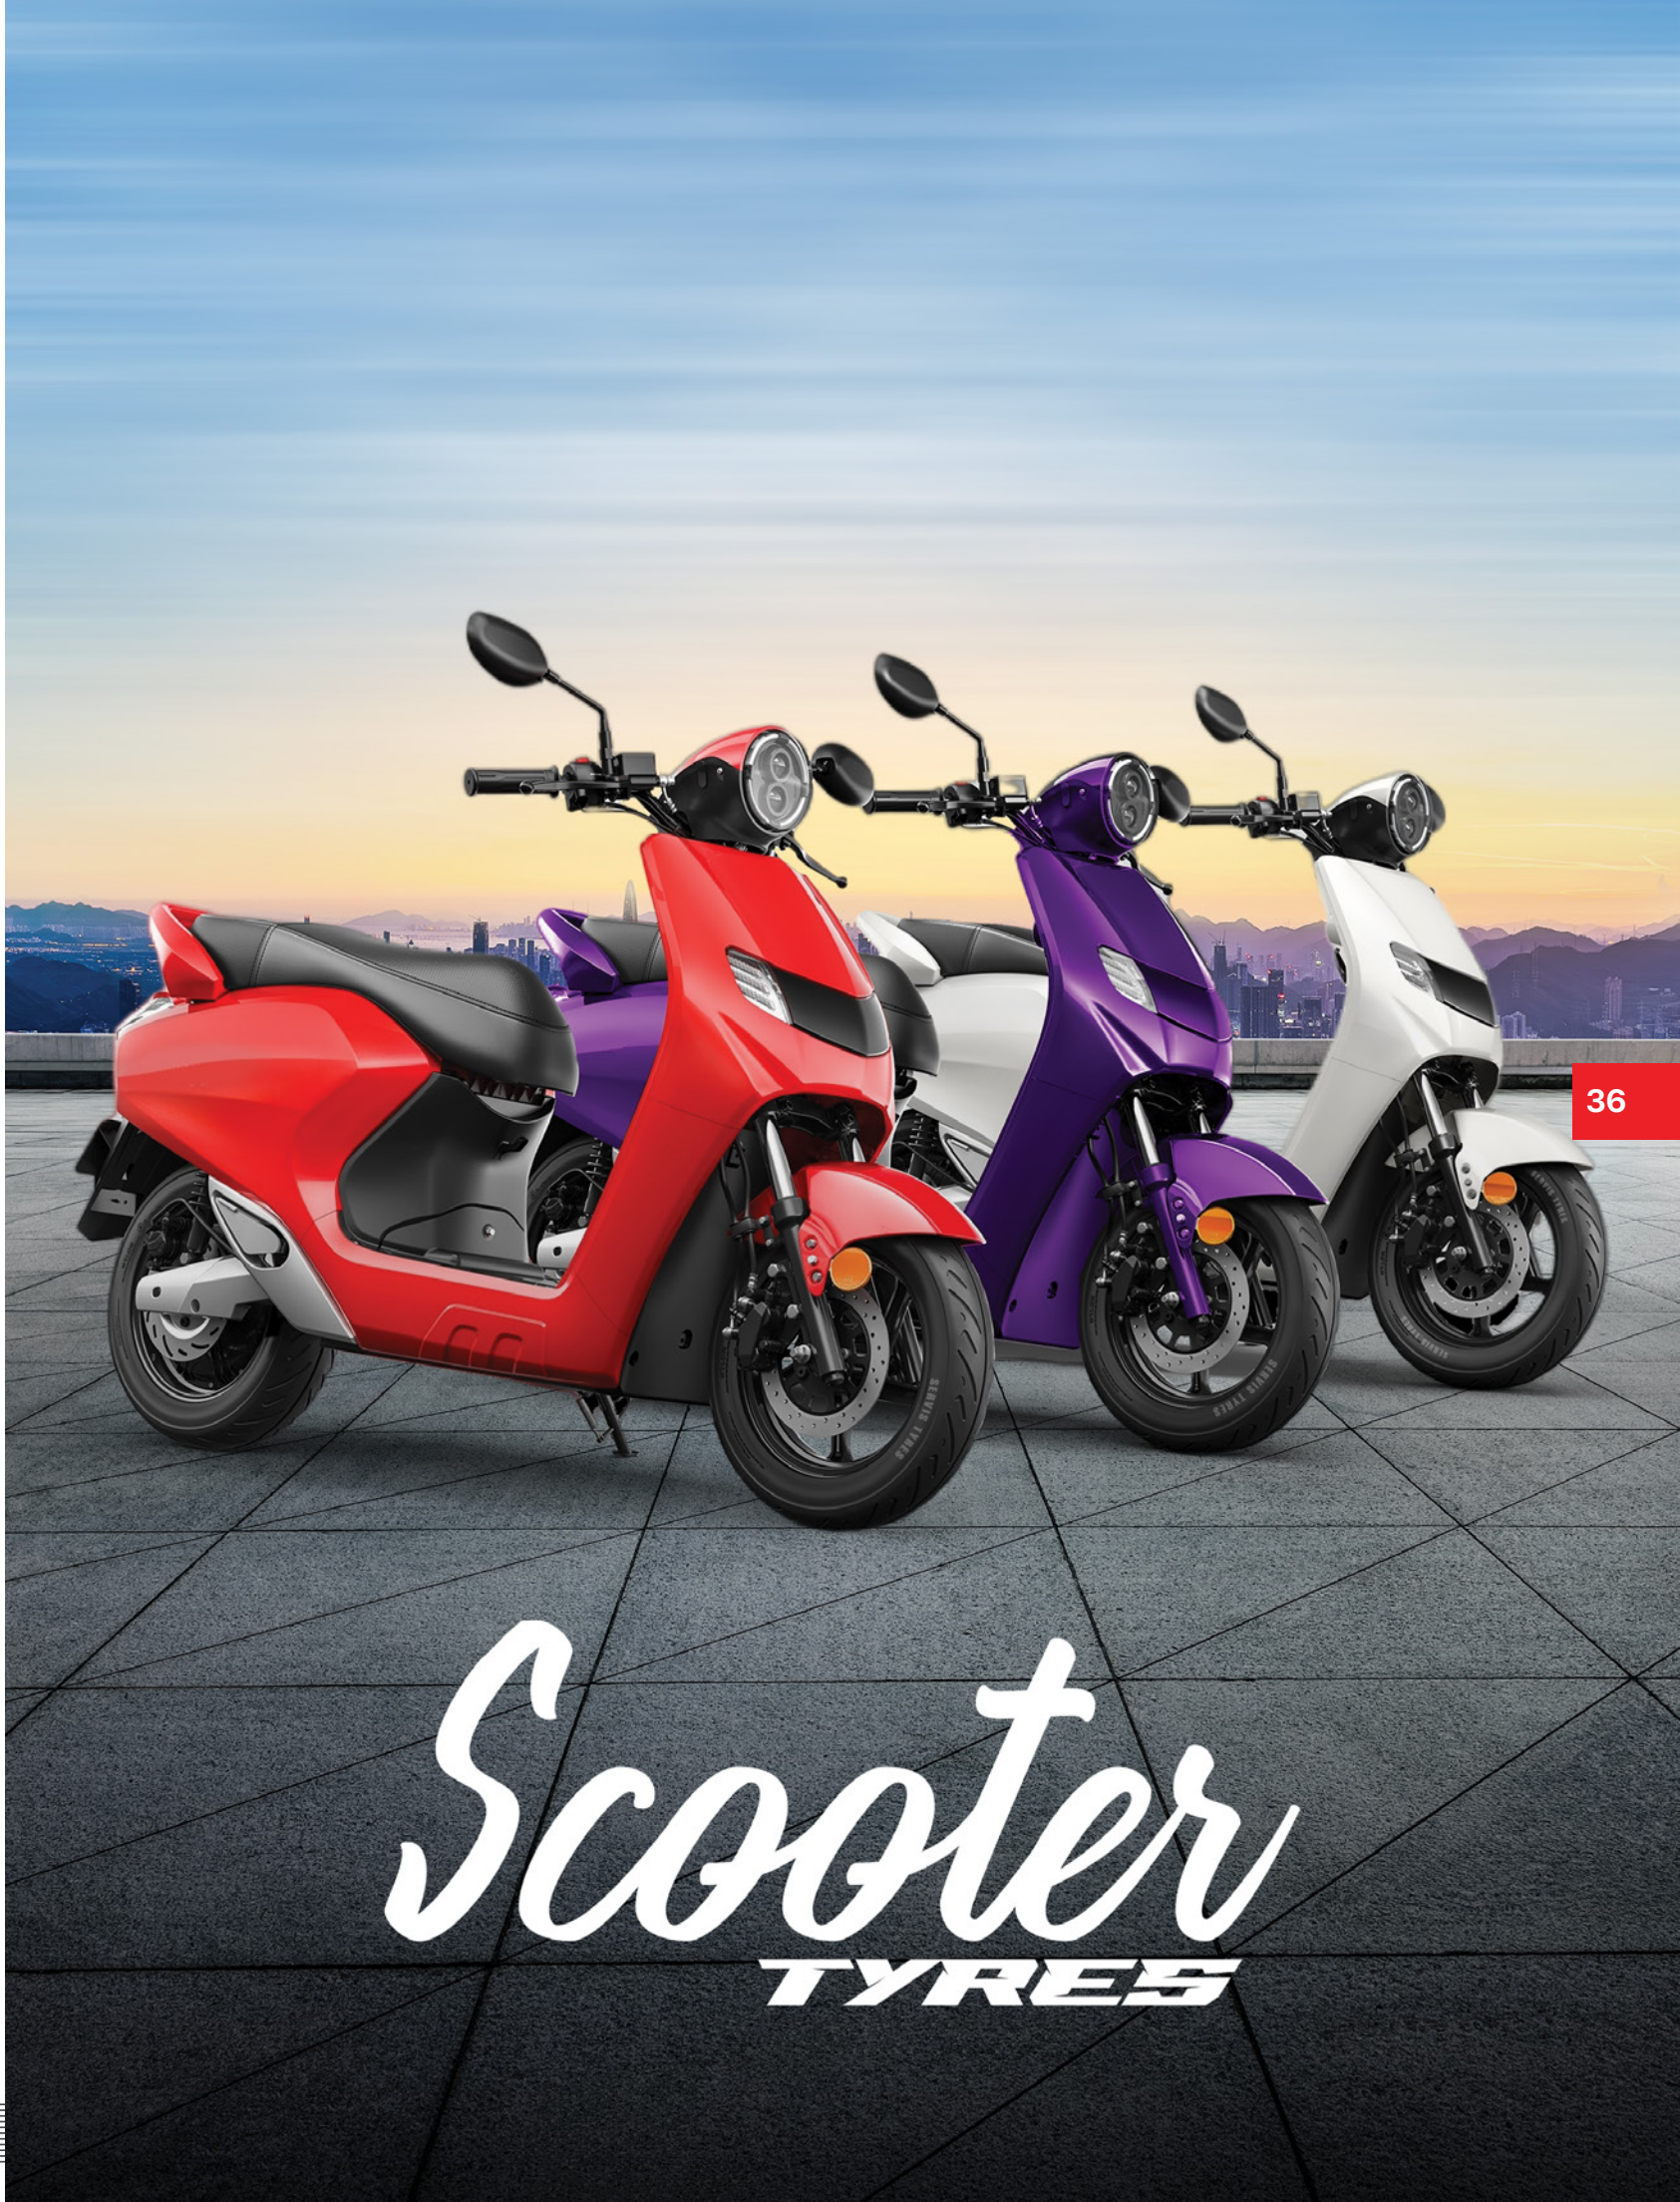



With experience of more than five decades of making bicycle tyres, Servis has a varied range of tyres for its customers not only in Pakistan but around the world.

Bicycle TYRES

Bicycle TYRES



ADMIRAL

Tyre Size	Weight / Tolerance
28 x 1.5	1260gms ±7%




ALPHA

Tyre Size	Weight / Tolerance
26 x 1 1/2 x 1 3/4	920gms ±7%



BEMISAL

Tyre Size	Weight / Tolerance
27 x 1 1/4	670gms ±7%



BRAVO

Tyre Size	Weight / Tolerance
27.5 x 2.10	1100gms ±7%



BLAZE -XP

Tyre Size	Weight / Tolerance
20 x 2.125	830gms ±7%



BMX

Tyre Size	Weight / Tolerance
16 x 1.75	475gms ±7%
20 x 2.125	700gms ±7%
24 x 2.125	950gms ±7%
26 x 2.125	1070gms ±7%



BMX NYLON

Tyre Size	Weight / Tolerance
24 x 2.125	950gms ±7%
26 x 2.125	1070gms ±7%



BMX LONG LIFE

Tyre Size	Weight / Tolerance
16 x 1.75	475gms ±7%



BYKO

Tyre Size	Weight / Tolerance
26 x 2.0	1070gms ±7%



FAST

Tyre Size	Weight / Tolerance
26 x 1.75 x 2	920gms ±7%



FIGHTER

Tyre Size	Weight / Tolerance
16 x 1.95	460gms ±7%



FLASH

Tyre Size	Weight / Tolerance
16 x 2.125	560gms ±7%



FUSION

Tyre Size	Weight / Tolerance
26 x 1 1/2 x 2	930gms ±7%



FORCE

Tyre Size	Weight / Tolerance
20 x 2.125	850gms ±7%
26 x 1.95	1010gms ±7%



FORCE 1

Tyre Size	Weight / Tolerance
700 x 35 C (28 x 15 1/8 x 13/8)	840gms ±7%



KARACHI EXPRESS 5

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



LAHORE EXPRESS 1

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



LAHORE EXPRESS 2

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



GALLOP

Tyre Size	Weight / Tolerance
26 x 1.95	955gms ±7%



GRIPPER

Tyre Size	Weight / Tolerance
28 x 1.5	1070gms ±7%



HAWK

Tyre Size	Weight / Tolerance
24 x 1.95	950gms ±7%
26 x 1.95	1073gms ±7%



LAHORE EXPRESS 3

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



LAHORE EXPRESS 4

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



LAHORE EXPRESS 5

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



JAZZ XP

Tyre Size	Weight / Tolerance
26 x 1.50	730gms ±7%



K2

Tyre Size	Weight / Tolerance
28 x 1.75	1050gms ±7%




KARACHI EXPRESS 1

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



LEADER

Tyre Size	Weight / Tolerance
28 x 1.5	1050gms ±7%



LOADER

Tyre Size	Weight / Tolerance
28 x 1.5	1215gms ±7%



LONG LIFE

Tyre Size	Weight / Tolerance
20 x 1 3/8	665gms ±7%
24 x 1 3/8	770gms ±7%
26 x 1 3/8	855gms ±7%



KARCHI EXPRESS 2

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



KARACHI EXPRESS 3

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



KARACHI EXPRESS 4

Tyre Size	Weight / Tolerance
28 x 1.5	845gms ±7%



LOONGLIFE ECO

Tyre Size	Weight / Tolerance
28 x 1.5	880gms ±7%



LOONGLIFE YELLOW

Tyre Size	Weight / Tolerance
28 x 1.5	995gms ±7%



MTB

Tyre Size	Weight / Tolerance
20 x 2.125	825gms ±7%



MTB SPORTS-001

Tyre Size	Weight / Tolerance
12 x 3.00	640gms ±7%




MTB SPORTS-002

Tyre Size	Weight / Tolerance
20 x 3.00	1120gms ±7%



MTB SPORTS-003

Tyre Size	Weight / Tolerance
20 x 3.00	1240gms ±7%



PAIDAR 4

Tyre Size	Weight / Tolerance
28 x 1.5	920gms ±7%



RACER BLACK

Tyre Size	Weight / Tolerance
28 x 1.5	980gms ±7%



RACER

Tyre Size	Weight / Tolerance
28 x 1 1/2	980gms ±7%



MTB SPORTS-004

Tyre Size	Weight / Tolerance
26 x 3.00	1800gms ±7%



MTB-007

Tyre Size	Weight / Tolerance
26 x 2.125	1180gms ±7%
24 x 2.125	1000gms ±7%



MTB JUNIOR

Tyre Size	Weight / Tolerance
12 X 1.75	450gms ±7%



RANGER

Tyre Size	Weight / Tolerance
28 x 1.5	1135gms ±7%



REVOLT

Tyre Size	Weight / Tolerance
27 x 1 3/8	850gms ±7%



RHINO

Tyre Size	Weight / Tolerance
29 x 2.10	1160gms ±7%



NAVIGATOR

Tyre Size	Weight / Tolerance
26 X 2.125	1150gms ±7%



NITRO

Tyre Size	Weight / Tolerance
24 x 1.95	950gms ±7%
26 x 1.95	1070gms ±7%



MTB NYLON

Tyre Size	Weight / Tolerance
26 x 2.125	1225gms ±7%



ROAD STAR

Tyre Size	Weight / Tolerance
26 x 2.0	1075gms ±7%



ROAD STAR 1

Tyre Size	Weight / Tolerance
28 x 1.75	1080gms ±7%



SEBAK

Tyre Size	Weight / Tolerance
20 x 3.00	1240gms ±7%



NITRO XP

Tyre Size	Weight / Tolerance
24 x 1.95	950gms ±7%
26 x 1.95	1070gms ±7%



NEW


ORBIT (PUNCTURE PROOF)

Tyre Size	Weight / Tolerance
37 - 622	736gms ±7%
40 - 622	794gms ±7%
47 - 622	883gms ±7%



PACE

Tyre Size	Weight / Tolerance
26 x 1.25	1060gms ±7%



SPEED

Tyre Size	Weight / Tolerance
16 x 1.75	500gms ±7%
20 x 2.125	827gms ±7%



SPRINT

Tyre Size	Weight / Tolerance
28 x 1.75	980gms ±7%



SPRINT (PUNCTURE PROOF)

Tyre Size	Weight / Tolerance
28 x 1.75	1180gms ±7%

Bicycle TYRES



SILVER STAR

Tyre Size	Weight / Tolerance
28 x 1.5	925gms $\pm 7\%$



NEW

TOURER (PUNCTURE PROOF)

Tyre Size	Weight / Tolerance
37 - 622	816gms $\pm 7\%$
40 - 622	874gms $\pm 7\%$
47 - 622	983gms $\pm 7\%$



THUNDER

Tyre Size	Weight / Tolerance
26 x 1 3/8	855gms $\pm 7\%$



TIGER

Tyre Size	Weight / Tolerance
16 x 1.95	570gms $\pm 7\%$



THRONE

Tyre Size	Weight / Tolerance
20 x 1.95	650gms $\pm 7\%$
24 x 1.95	800gms $\pm 7\%$



VIGO

Tyre Size	Weight / Tolerance
26 x 1 1/2 x 1 3/4	920gms $\pm 7\%$



WINNER

Tyre Size	Weight / Tolerance
28 x 1.5	1070gms $\pm 7\%$



ZAPPER PLUS

Tyre Size	Weight / Tolerance
29 x 2.10	1065gms $\pm 7\%$



ZAPPER - XP

Tyre Size	Weight / Tolerance
16 x 1.75	560gms $\pm 7\%$
20 x 1.75	830gms $\pm 7\%$



Bicycle TYRES

Rickshaw TYRES



Commercially used rickshaw tyres are specially designed keeping in mind their usage in all sorts of environments and on all road surfaces for an unmatched durability and fuel efficiency.

Rickshaw / Tuk Tuk TYRES



AUTO MILLER

This pattern features parallel ribs for a smoother and stable ride. Zigzag rib corners provide extra road grip while braking.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	8	3000gms $\pm$ 7%	108	48 E	44	300



CHAMPION

This pattern features horizontally placed big blocks for weight-bearing and rough block surface to increase road grip.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	10	3360gms $\pm$ 7%	108	54 E	35	240



CHAMPION-RG

This pattern features horizontally placed big blocks for weight-bearing and rough block surface to increase road grip.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
135-10	12	4585gms $\pm$ 7%	133	80 F	65	450



CHAMPION-MG

This pattern features rib design to provide maximum ride comfort and stability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
135-10	12	4585gms $\pm$ 7%	133	80 F	65	450



Rikshaw / Tuk Tuk TYRES



CHEETAH

This cross-block profile results in a solid surface for increased weight-bearing capability as a rear tyre. Horizontal breaks between the large blocks provide enhanced braking capability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	8	3225gms ±7%	108	54 E	35	240
4.00-8	10	3360gms ±7%	108	54 E	35	240



E-16

Angled blocks with central rib provide enhanced stability and improved braking capability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	8	3000gms ±7%	108	54 E	35	240



LEADER

Blocked pattern enhances road grip and maximizes load bearing ability of the tyre.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	10	3805gms ±7%	110	76 F	62	427



LONGLIFE 1

This heavier cut block design provides maximum road grip and braking ability with added strength and load-bearing capability. Multi grooved block design provides excellent wet performance.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
135-10 HP	10	4480gms ±7%	132	80 F	65	450



LONGLIFE FRONT

This front pattern features fractured ribs in the middle and aggressive small blocks on the sides to maximize road grip for the solo front tyre of 3 wheeler vehicles.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8 F	8	3115gms ±7%	108	54 E	35	240



LONGLIFE REAR

This cross-block profile results in a solid surface for increased weight-bearing capability as a rear tyre. Horizontal breaks in between big blocks provide enhanced braking capability.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8 R	8	3115gms ±7%	108	54 E	35	240



LONGLIFE XP

Smooth ribs in the centre enhance vector performance, stability and weight-bearing ability, while shoulder blocks provide drag while cornering.


Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8 R	8	3000gms ±7%	108	76 F	62	425



NITRO

This aggressive block pattern is designed for maximum road grip, braking ability and load-bearing.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	10	3805gms ±7%	110	76 E	62	425

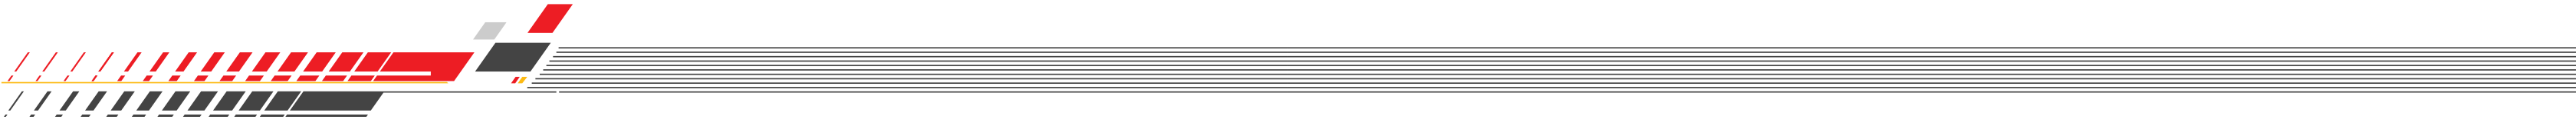



Rikshaw / Tuk Tuk TYRES



RACER

This pattern features horizontally placed big blocks for weight-bearing and rough block surface to increase road grip.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	8	3000gms ±7%	108	54 E	35	240



SEAL

This pattern features parallel ribs for a smoother and stable ride. Zigzag rib corners provide extra road grip while braking.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	8	3680gms ±7%	108	76 F	44	240

49



SRF

This pattern features parallel ribs for a smoother and stable ride. Zigzag rib corners provide extra road grip while braking.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	10	3805gms ±7%	110	76 F	62	425



MA

With a ribbed pattern, this tyre blends maneuverability, stability, and safety effectively.



Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.50-10 TT	12	4480gms ±7%	120	80 F	44	300



VIGO-MG

Featuring rib pattern, this tyre combines excellent maneuvering ability with stability and safety.

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
5.00-10	10	4455gms ±7%	142	80 F	65	450

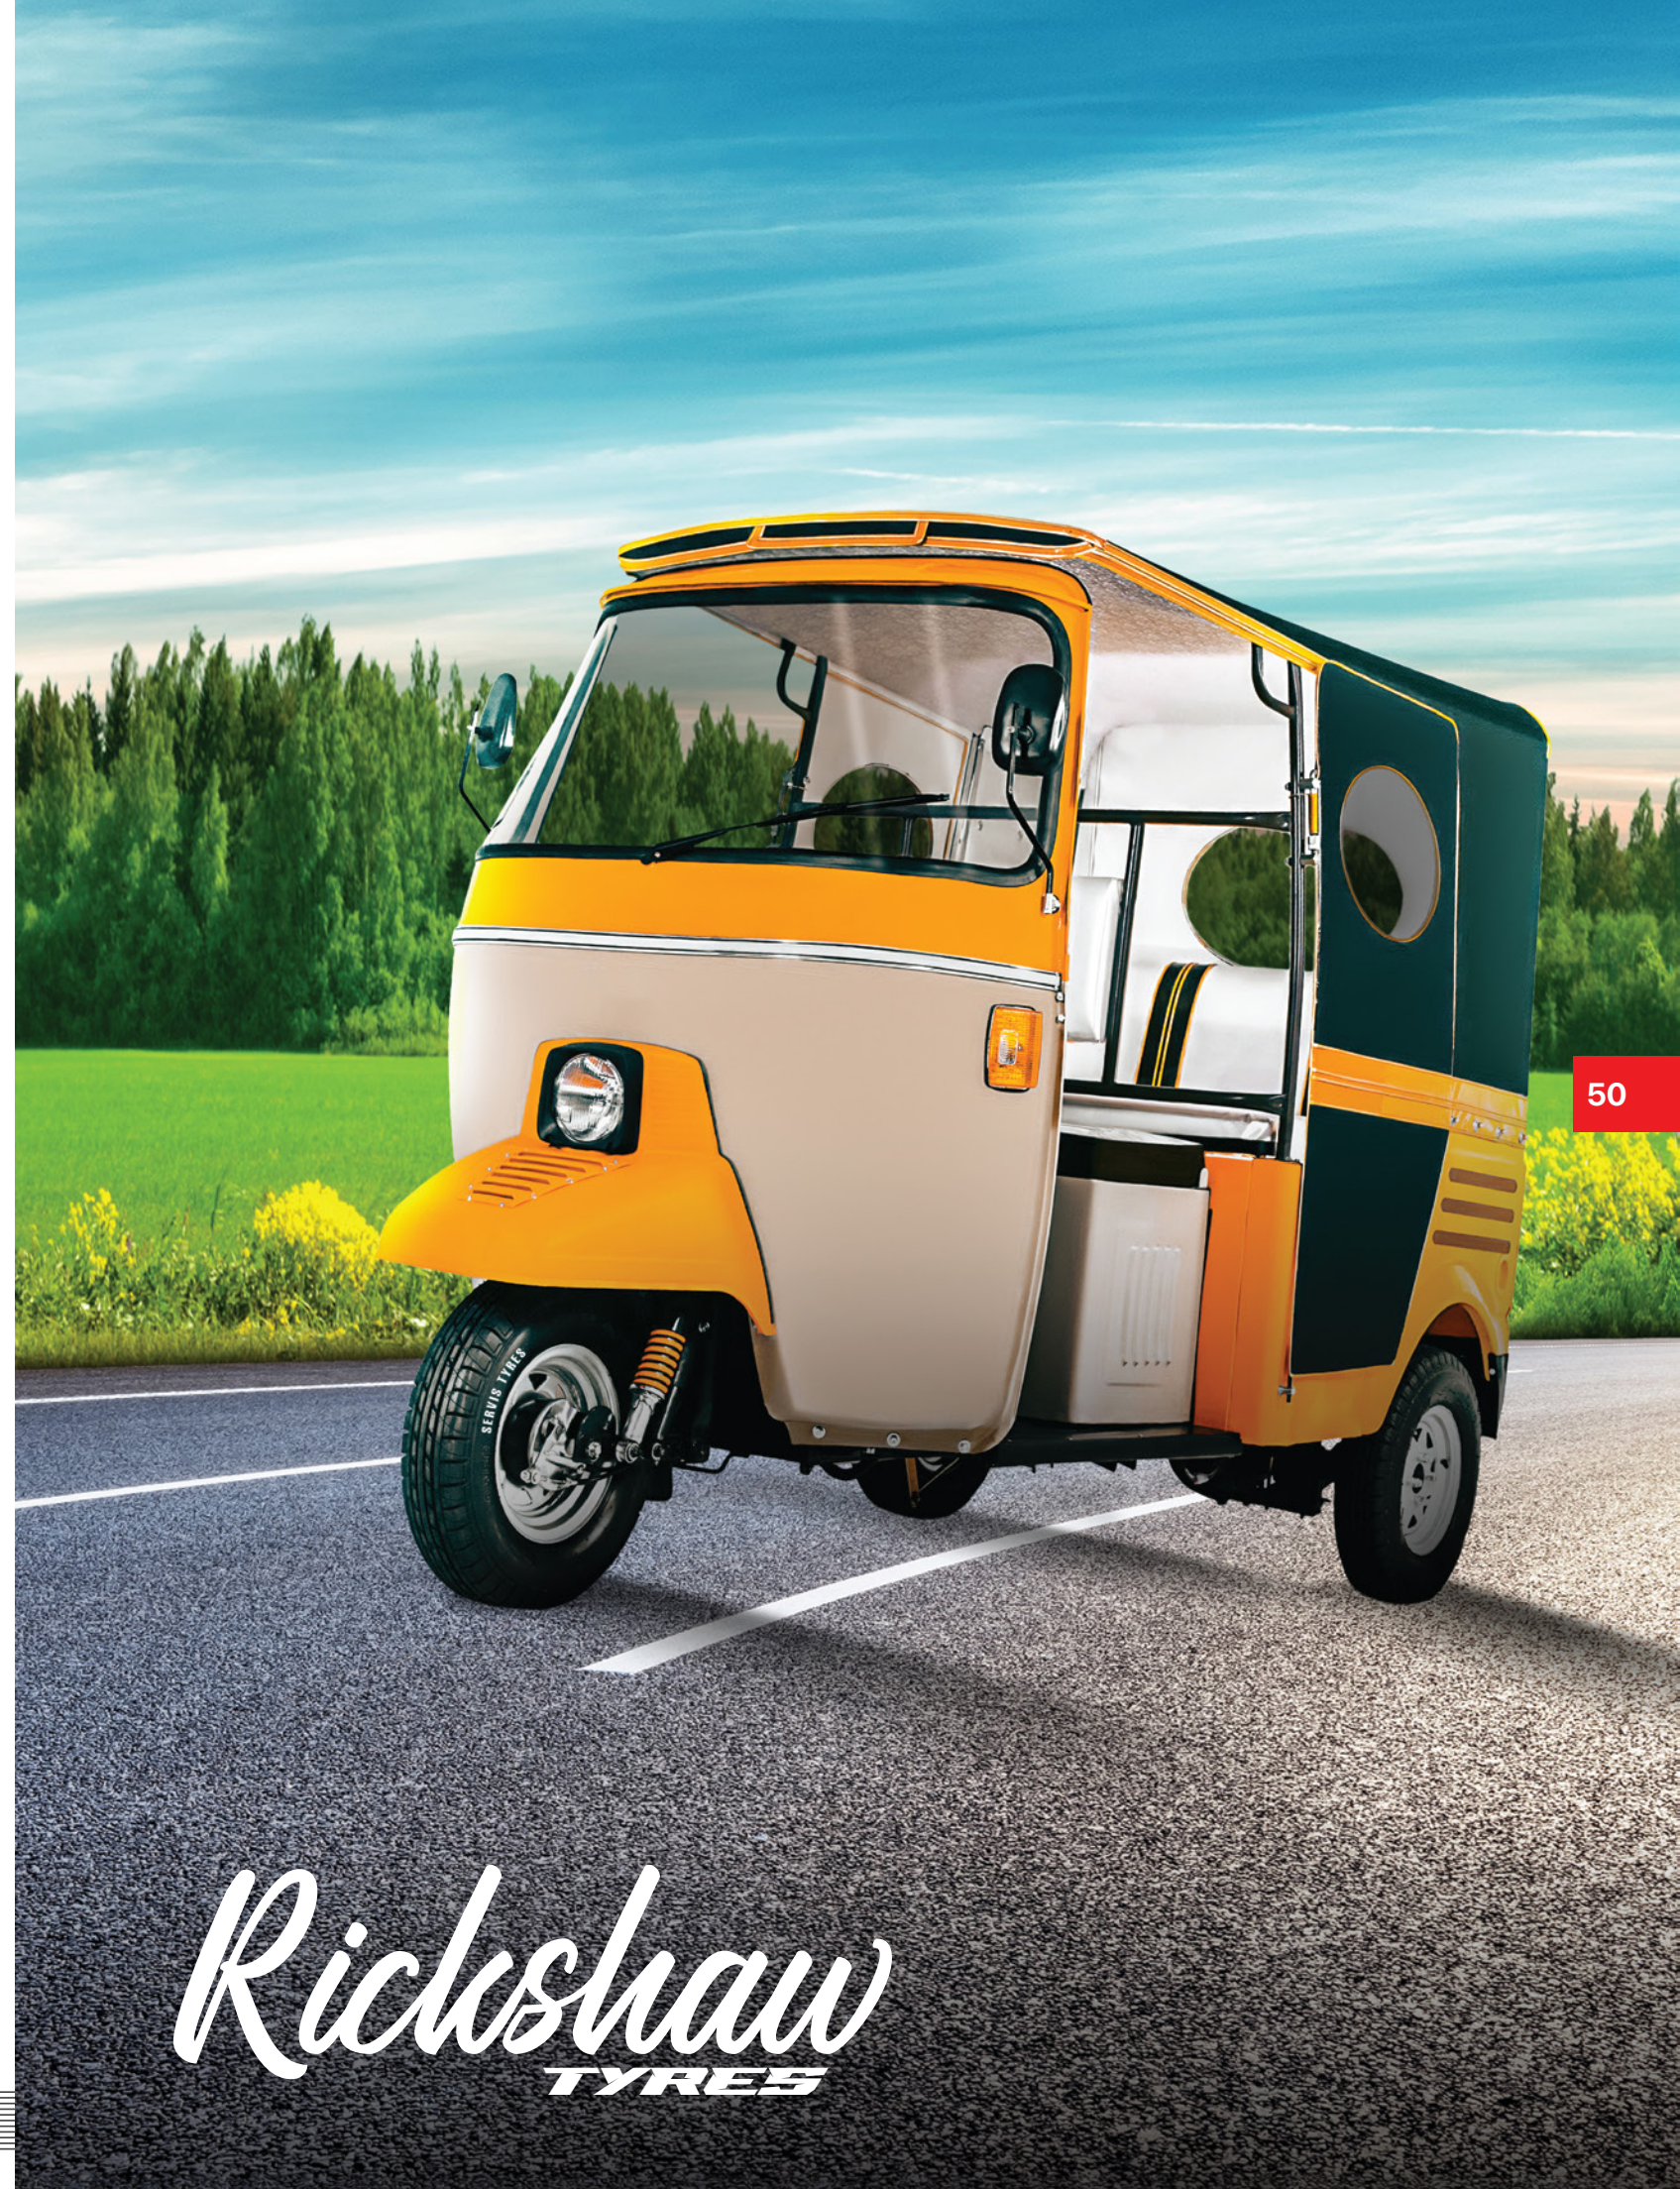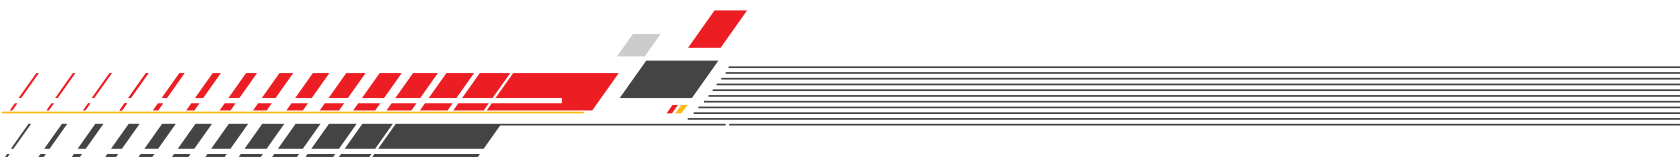

50

ULT / Loader

TYRES



51

Vehicles made to carry load demand tyres that are made to bear heavy loads. Servis ULT tyres are not only capable of carrying heavy loads but also provide comfort while driving.

ULT / Loader

TYRES



CHAMPION 2

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.50-12	8	5800gms ±7%	132	75 J	58	400



CHAMPION-CG


Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.50-12	10	5985gms ±7%	132	75 J	58	400
5.00-12	12	7050gms ±7%	148	91 J	80	550
5.00-12	8	6825gms ±7%	150	81 J	80	550

52



CHAMPION-DG

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
5.00-12	8	6825gms ±7%	150	81 J	80	550
5.00-12	12	7050gms ±7%	148	91 J	80	550

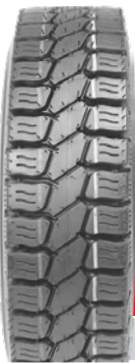

FIGHTER

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.50-12	10	6986gms ±7%	132	75 J	58	400

ULT / Loader

TYRES



HOLLANDER (ND)

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
6.00-16	10	10.85 kgs ±7%	167	101 J	62	425



LOADER

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
5.00-12	12	7048gms ±7%	148	81 J	58	400



LONG LIFE

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.50-12	6	5165gms ±7%	132	75 J	58	400
4.50-12	8	6120gms ±7%	132	77 J	58	400



TURBO

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.50-12	8	5000gms ±7%	120	71 J	57	400
5.00-12	8	5600gms ±7%	145	81 J	58	400




VIGO-MG

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
5.00-12	14	8000gms ±7%	148	91 J	80	550



ZARANG

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.50-12	8	4830gms ±7%	120	91 J	80	550

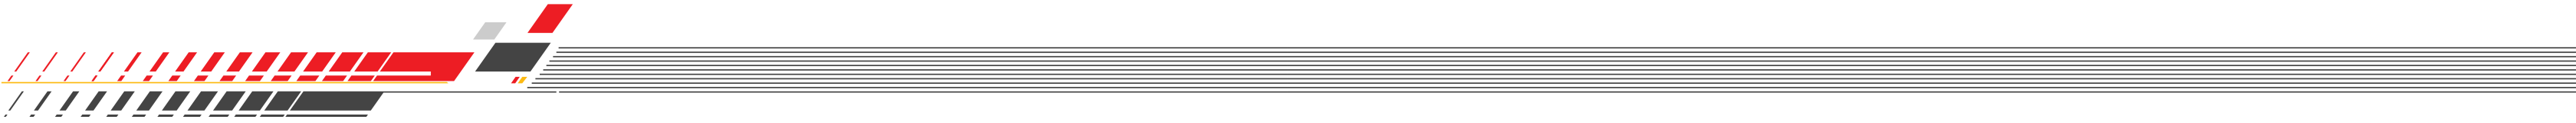



Wheelbarrow

TYRES

55

Smallest of the tyres with the biggest of the responsibilities, Servis Trolley tyres are always the first choice as they last longer and bear loads others can't.

Trolley

TYRES



LONG LIFE

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-8	2	1575gms ±7%	84	35 A1	25	172
3.50-8	4	1790gms ±7%	84	35 A1	25	172
3.50-8	6	1830gms ±7%	84	35 A1	25	172



LONG LIFE

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-8	2	1135gms ±7%	78	26 A1	30	210
3.00-8	6	1355gms ±7%	76	35 A1	28	176

56



LONG LIFE

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.80/4.00-8	2	1200gms ±7%	89	26 A1	25	173



LONG LIFE-TG

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-8	2	1455gms ±7%	78	26 A1	25	172
3.50-8	4	1955gms ±7%	94	26 A1	25	172
3.50-8	6	2025gms ±7%	94	26 A1	25	172

Trolley TYRES



PAIDAR

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-8	6	2190gms ±7%	84	43 A1	33	225

Trolley TYRES



VIGO

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.00-8	8	1510gms ±7%	70	26 A1	29	200

57



PRINCE

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-8	2	1590gms ±7%	84	43 A1	33	225



RAVO

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
4.00-8	6	2915gms ±7%	106	43 A1	33	225

58




WHEEL BARROW-LL

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.50-8 JG	4	1785gms ±7%	84	35 A1	25	210
3.50-8	4	1785gms ±7%	84	35 A1	25	172
4.00-8	2	2025gms ±7%	94	35 A1	30	210
4.00-8	6	2105gms ±7%	94	35 A1	30	210



WINNER

Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
3.75-8	4	2190gms ±7%	86	26 A1	29	200

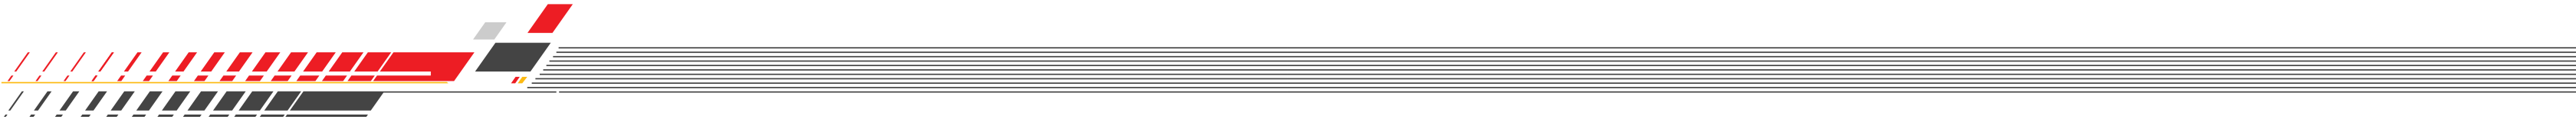

Developed with the highest degree of proficiency, Servis' range of versatile and reliable Agriculture Tyres is best suited for lifting heavy weights for both ploughing and on-the-road usage.

Tractor
TYRES

Tractor
TYRES

SERVIS
LONGLIFE CG (F)

Developed with the highest degree of proficiency, this tread design is suited for tractors used for lifting heavy weights. Its special cut lug design provides excellent grip on all terrains.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
6.00-16	10	174	88 A6	47	325
6.00-16	12	174	88 A6	47	325
7.50-16	10	210	103 A6	54	373
7.50-16	12	210	103 A6	54	373



SERVIS
LONGLIFE (F)

A well-established design in Tractor front tyre category, Longlife (F) provides excellent field steering capabilities and minimizes lateral side-slip.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
6.00-16	6	174	88 A6	47	325
6.00-16	8	174	88 A6	47	325
6.00-16	10	174	88 A6	47	325
7.50-16	6	210	103 A6	54	373
7.50-16	8	210	103 A6	54	373
7.50-16	10	210	103 A6	54	373



SERVIS
LONGLIFE (F)

SERVIS LONGLIFE is a durable and long-lasting tyre, it excels on slippery roads. Its self-cleaning design makes it an ideal choice for muddy and sandy tracks.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
7.50-16 BG	8	200	103 A6	54	370
7.50-16 BG	10	200	109 A6	68	469
7.50-16 BG	12	200	113 A6	70	485
7.50-16 BG	14	200	116 A6	75	520
9.00-20 HD	10	215	118 A6	46	318
9.00-20 HD	12	215	120 A6	50	345
9.00-20 HD	14	215	122 A6	52	358



Tractor TYRES

SERVIS LONGLIFE HD (F)

Developed with the highest degree of proficiency, this tread design is suited for tractors used for lifting heavy weights. Its special cut lug design provides excellent grip on all terrains.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
7.50-20	8	203	109 A6	54	370
7.50-20	10	203	112 A6	52	358
7.50-20	12	203	114 A6	55	379
7.50-20	14	203	115 A6	58	400



61

SERVIS KING (F)

Ideal tyre for both ploughing and on-the-road usage. The best choice for versatile and reliable tyre, with no compromise on performance.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
7.50-16	8	200	103 A6	54	370



SERVIS PULLER (F)

Geared for the newest, strongest tractors, PULLER enables high loads, maximizing business productivity.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
11.2-20	8	260	116 A6	35	240



Tractor TYRES

SERVIS PULLER (F)

PULLER (F) Established tractor front tyre design, offers excellent field steering, reduces lateral side-slip.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
12.4-24	8	311	117 A7	32	220



SERVIS KING

Popular tread design, SERVIS KING is optimized to carry heavy loads with extra grip and stability for improved performance.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
12.4-28	8	323	123 A6	33	230
12.4-28	12	323	131 A6	33	230



62

SERVIS RUSTAM

Designed to equip the latest, most modern and most powerful tractors, RUSTAM allows you to carry very high loads maximizing your business productivity.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
14.9-28	8	360	130 A6	32	220
14.9-28	12	360	138 A6	38	260





Tractor

TYRES

SERVIS GOLD

Designed to equip the latest, most modern and most powerful tractors, SERVIS GOLD allows you to carry very high loads maximizing your business productivity. This tyre provides an excellent driving comfort as well as significant fuel savings.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
16.9-30	8	430	132 A8	24	170
16.9-30	14	430	144 A8	39	270
18.4-30	8	480	139 A8	20	140
18.4-30	14	480	147 A8	39	270



SERVIS CHAMPION

Ideal tyre for both ploughing and on-the-road use. The best choice for versatile and reliable performance, without a compromise on maneuverability.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
12.4-28	8	323	123 A6	33	230
12.4-28	12	323	131 A6	33	230
13.6-28	8	346	123 A6	28	190
13.6-28	12	346	130 A6	42	290
14.9-28	8	360	130 A6	32	220
14.9-28	12	360	138 A6	38	260
16.9-30	8	420	132 A8	24	170
16.9-30	14	420	144 A8	39	270
18.4-30	8	480	139 A8	20	140
18.4-30	14	480	147 A8	39	270

SERVIS HERO

It is designed for safe handling on hilly or sloping lands and its open center pattern provides efficient self-cleaning, high traction and reduced slipping.

The special lug design reduces any kind of crop damage (especially for rice crop) during field operations.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
12.4-28	8	323	123 A6	33	230
12.4-28	12	323	131 A6	33	230



Tractor

TYRES

SERVIS HERCULES HD

Designed with the latest technology for the modern tractors. SERVIS HERCULES HD supports heavy loads maximizing business productivity. This tyre provides an excellent driving experience and significant fuel savings.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
15.5-38	12	365	139 A6	33	227
15.5-38	14	365	142 A6	38	262



SERVIS HERCULES PLUS

Developed with the highest degree of proficiency, this tread design is suited for tractors used for lifting heavy weights. Its special cut lug design provides excellent grip on all terrains.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
15.5-38	8	393	132 A6	24	165
15.5-38	10	393	136 A6	29	200
15.5-38	12	393	139 A6	33	227
15.5-38	14	393	142 A6	38	262



LEADER

Geared for the newest, strongest tractors, LEADER enables high loads, maximizing business productivity.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
11.2-24	8	310	111 A6	35	240





AGRI ECO RANGE

SERVIS TAARA (F)

SERVIS TAARA (F) Popular tread, excels in heavy loads, provides firm grip and enhances stability for better performance.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
6.00-16	6	159	88 A6	50	340
6.00-16	8	159	94 A6	65	450
7.50-16	6	204	98 A6	41	280
7.50-16	8	204	103 A6	54	370
7.50-16	10	204	109 A6	69	475



SERVIS ZAMEENDAR (R)

Ideal tyre for both ploughing and on-the-road use, it is considered the top choice as a versatile and reliable tyre, with no compromise on performance.

Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
12.4-28	6	327	117 A6	25	170
12.4-28	8	327	123 A6	33	230
12.4-28	10	327	124 A6	35	240
12.4-28	12	327	125 A6	36	250
13.6-28	6	350	121 A6	23	160
13.6-28	8	350	125 A6	30	210
13.6-28	10	350	127 A6	33	230
13.6-28	12	350	128 A6	35	240
14.9-28	6	368	121 A6	20	140
14.9-28	8	368	126 A6	26	180
14.9-28	10	368	130 A6	32	220
14.9-28	12	368	134 A6	35	240
16.9-30	6	426	126 A6	19	130
16.9-30	8	426	132 A6	25	170
16.9-30	10	426	136 A6	28	190
16.9-30	12	426	140 A6	32	220
18.4-30	6	474	130 A6	17	120
18.4-30	8	474	135 A6	20	140
18.4-30	10	474	140 A6	26	180
18.4-30	12	474	145 A6	32	220

65



66



Tractor
TYRES

Tubes



Tubes

MOTORCYCLE / SCOOTER TUBES (BR)

TUBE SIZE	MATERIAL	WEIGHT (gms)	FLAT-WIDTH (mm)	NOZZLE TYPE
2.75/3.00-10	BR	320 ±3%	86	JS 87C
3.50-10	BR	344 ±3%	99	JS 87C
70/90-14	BR	278 ±3%	70	TR4
80/90-14	BR	278 ±3%	70	TR4
90/90-14	BR	358 ±3%	95	TR4
2.75/3.00-14	BR	318 ±3%	76	TR4
3.00-16	BR	411 ±3%	95	TR4
3.50/4.00-16	BR	483 ±3%	100	TR4
2.25-17	BR	306 ±3%	66	TR4
2.25/2.50-17	BR	329 ±3%	70	TR4
100/90-17	BR	432 ±3%	95	TR4
2.75/3.00-17	BR	373 ±3%	76	TR4
3.00-17	BR	432 ±3%	95	TR4
3.50/4.00-17	BR	513 ±3%	100	TR4
4.00/4.60-17	BR	533 ±3%	105	TR4
2.50-18	BR	341 ±3%	70	TR4
2.75/300-18	BR	408 ±3%	76	TR4
2.75-18	BR	418 ±3%	85	TR4
100/90-18	BR	452 ±3%	95	TR4
3.00-18	BR	452 ±3%	95	TR4
3.50/4.10-18	BR	563 ±3%	100	TR4
90/90-19	BR	445 ±3%	85	TR4
3.25/3.50-19	BR	508 ±3%	95	TR4
2.75/3.00-21	BR	473 ±3%	76	TR4
3.00-8	BR	249 ±3%	72	JS 87C
3.50-8	BR	285 ±3%	99	JS 87C/VAR 32
3.00-12	BR	300 ±3%	82	JS 87C

Tubes


MOTORCYCLE / SCOOTER TUBES (NR)				
TUBE SIZE	MATERIAL	WEIGHT(gms)	FLAT-WIDTH (mm)	NOZZLE TYPE
3.50-10	NR	439 ±3%	99	JS 87C
2.75/3.00-14	NR	380 ±3%	76	TR4
3.00-16	NR	486 ±3%	95	TR4
3.00-17	NR	511 ±3%	95	TR4
2.25-17	NR	361 ±3%	66	TR4
2.25/2.50-17	NR	388 ±3%	70	TR4
2.75/3.00-17 + XP	NR	438 ±3%	85	TR4
4.00/4.60-17	NR	639 ±3%	105	TR4
2.50-18	NR	425 ±3%	70	TR4
2.75-18	NR	491 ±3%	85	TR4
3.00-18	NR	536 ±3%	95	TR4
90/90-18	NR	491 ±3%	85	TR4
3.50/4.10-18	NR	698 ±3%	100	TR4
90/90-19	NR	558 ±3%	85	TR4
2.75/3.00-21	NR	567 ±3%	76	TR4

ULT TUBES				
TUBE SIZE	MATERIAL	WEIGHT(gms)	FLAT-WIDTH (mm)	NOZZLE TYPE
1.35-10	BR	448 ±3%	126	TR13
1.35/145-12	BR	526 ±3%	140	TR 13
4.00-8	BR	325 ±3%	120	JS 87C
4.50-12	BR	514 ±3%	142	TR 13
4.50-12	BR	514 ±3%	142	JS 87C
5.00-12	BR	587 ±3%	152	TR 13
6.15-13	BR	679 ±3%	154	TR 13
6.50-14	BR	873 ±3%	187	TR 13
6.00-16	BR	817 ±3%	160	TR 15
6.50-16	BR	903 ±3%	176	TR 15

Tubes

TROLLEY TUBES				
TUBE SIZE	MATERIAL	WEIGHT(gms)	FLAT-WIDTH (mm)	NOZZLE TYPE
3.00-8	NR	288 ±3%	72	DIN 7777
3.25-8	NR	259 ±3%	84	DIN 7777
3.50-8	NR	289 ±3%	101	DIN 7777
4.00-8	NR	382 ±3%	120	JS87C

BICYCLE TUBES (BR)				
TUBE SIZE	MATERIAL	WEIGHT (gms)	FLAT-WIDTH (mm)	NOZZLE TYPE
12 x 3.00	BR	180 ±3%	80	VAR32
20 x 3.00	BR	300 ±3%	70	VAR32
26 x 3.00	BR	390 ±3%	70	VAR32
29 x 2.10	BR	230 ±3%	42	VAR32
28 x 1.50	BR	260 ±3%	42	TR1
27 x 1 1/4	BR	260 ±3%	42	TR1
26 x 1.38	BR	220 ±3%	42	TR1
24 x 1.38	BR	195 ±3%	42	TR1
20 x 1.38	BR	180 ±3%	42	TR1
26 x 2.125	BR	300 ±3%	54	TR1
24 x 2.125	BR	280 ±3%	54	TR1
20 x 2.125	BR	220 ±3%	54	TR1
20 x 1.75/2.125	BR	175 ±3%	42	TR1
16 x 1.75	BR	160 ±3%	47	TR1
26 x 1.75/2.125	BR	250 ±3%	42	VAR32
24 x 1.75/2.125	BR	205 ±3%	42	VAR32
20 x 1.75/2.125	BR	175 ±3%	42	VAR32
16 x 1.75/2.125	BR	130 ±3%	42	VAR32
28 x 1.75	BR	300 ±3%	47	VAR32
27 x 1.38	BR	260 ±3%	42	VAR32/TR1
28 x 1.50	BR	260 ±3%	42	VAR32/TR1
28 x 1.75	BR	300 ±3%	47	VAR32 (48mm)
26 x 2.125	BR	300 ±3%	54	VAR32 (48mm)

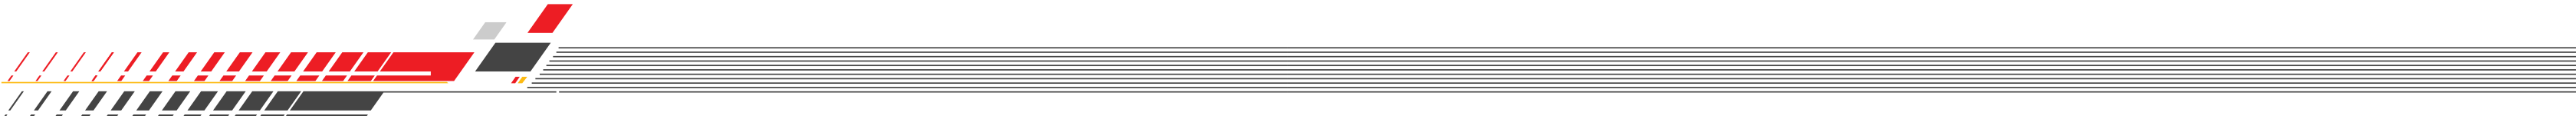

Tubes

BICYCLE TUBES (NR)

TUBE SIZE	MATERIAL	WEIGHT(gms)	FLAT-WIDTH (mm)	NOZZLE TYPE
28 X 1.50	NR	330 ±3%	42	TR1
27 x 1 1/4	NR	285 ±3%	42	TR1
27 x 1.50	NR	330 ±3%	42	TR1
26 x 1.38	NR	270±3%	42	TR1
24 x 1.38	NR	250±3%	42	TR1
20 x 1.38	NR	210±3%	42	TR1
26 x 2.125	NR	345±3%	54	TR1
24 x 2.125	NR	320±3%	54	TR1
20 x 2.125	NR	260±3%	54	TR1
16 x 1.75	NR	185±3%	47	TR1
12 x 1.75	NR	150±3%	47	TR1
26 x 1.75/2.125	NR	260±3%	42	TR1
24 x 1.75/2.125	NR	250±3%	42	TR1
20 x 1.75/2.125	NR	200±3%	42	TR1
16 x 1.75/2.125	NR	165±3%	42	TR1

AGRI TUBES


TUBE SIZE	MATERIAL	WEIGHT (gms)	FLAT-WIDTH (mm)	NOZZLE TYPE
12.4/11-28	BR	4400 ±3%	324	TR 218A
14.9/13-28	BR	5500 ±3%	393	TR 218A
16.9/14-30	BR	6800 ±3%	472	TR 218A
18.4/15-30	BR	7500 ±3%	490	TR 218A
18.4/15-30 HD+	BR	7900 ±3%	520	TR 218A
6.00/6.50-16	BR	824 ±3%	175	TR 13
7.50-16	BR	1400 ±3%	220	TR 13 / TR 15
15.5-38	BR	8390 ±3%	402	TR 218A

TBR TUBES

TUBE SIZE	MATERIAL	WEIGHT (gms)	FLAT-WIDTH (mm)	NOZZLE TYPE
7.50-16	BR	1500 ±3%	224	TR 177A
8.25-16	BR	1750 ±3%	249	TR 78A
9.00-20	BR	3000 ±3%	268	TR 179A
10.00-20	BR	3150 ±3%	280	TR 179A
11.00-20	BR	3500 ±3%	305	TR 179A

Nozzles


DIN-7777

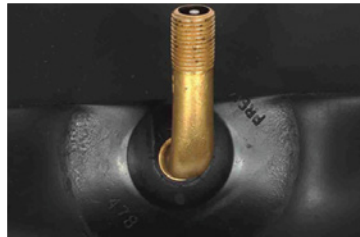

JS 87C BR



TR 13

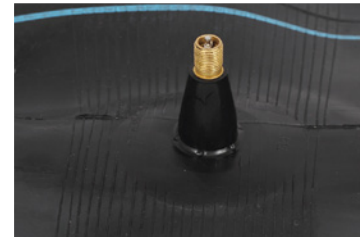

TR 15



VAR 32



TR 1



TR 4



TR-78A / TR-177A / TR-179A



TR-218A






MOTORCYCLE TYRES				RIM SIZE 14"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Ariana	2.75-14	6	2250gms ± 7%	76	34P	33	225
Cruiser	80/100-14	6	2695gms ± 7%	80	40P	33	225
Marathon	80/100-14	6	2381gms ± 7%	80	49P	41	280
Velocity	70/90-14	6	1510gms ± 7%	70	34P	33	225
Velocity Plus	80/90-14	6	2285gms ± 7%	80	40P	33	225
Velocity Plus	80/90-14 TL	6	2575gms ± 7%	80	40P	33	225
Velocity Plus	90/90-14 TL	6	3380gms ± 7%	90	46P	33	225
Velocity 1	90/90-14	6	2885gms ± 7%	90	46P	33	225
Velocity 1	90/90-14 TL	6	3205gms ± 7%	90	46P	33	225
Velocity 1	100/90-14 TL	6	3925gms ± 7%	100	51P	33	225

MOTORCYCLE TYRES				RIM SIZE 16"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Advent	3.50-16	6	3230gms ± 7%	94	58P	33	230
Champion	110-90-16	6	5010gms ± 7%	110	59P	33	225
Dura Grip	110/90-16 TL	6	5188gms ± 7%	110	65P	41	280
Longlife New	3.00-16	6	2600gms ± 7%	82	48P	40	280
Max Grip	110/70-16 TL	6	3525gms ± 7%	110	52P	32	220
Max Grip	130/70-16 TL	6	5020gms ± 7%	130	61P	32	220
Revolution	110/90-16 TL	6	5010gms ± 7%	110	59P	33	225
Runner	120/80-16 TL	6	4597gms ± 7%	120	60P	32	225
Velocity 1	80/90-16 TL	6	2917gms ± 7%	80	43P	33	225
Vogue	100/80-16 TL	6	3735gms ± 7%	100	50S	36	250
Vogue	110/70-16 TL	6	3350gms ± 7%	110	54S	36	250
Vogue	140/60-16 TL	6	5545gms ± 7%	140	63S	41	280
Vogue	120/80-16 TL	6	5265gms ± 7%	120	60S	32	225
Warrior	3.25-16 TL	6	3990gms ± 7%	92	58P	32	225

MOTORCYCLE TYRES				RIM SIZE 17"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Ace	110/90-17 TL	6	5345gms ± 7%	110	60P	33	225
Ace	120/90-17 TL	6	5750gms ± 7%	120	64S	36	250
Alpha	2.75-17 TL	6	2900gms ± 7%	76	47P	40	280
Alpha	3.00-17 TL	6	3365gms ± 7%	82	50P	40	280
Aspire	120/80-17 TL	6	4880gms ± 7%	120	61S	36	250
Challenger	2.50-17	8	2255gms ± 7%	65	48P	40	275
Champ	2.25-17F	6	1515gms ± 7%	62	33L	32	220



MOTORCYCLE TYRES				RIM SIZE 17"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Cheetah Front	2.25-17 F	6	1515gms ± 7%	62	37 L	45	310
Cheetah Front	2.75-17 F	6	2260gms ± 7%	76	47P	40	280
Cheetah Rear	2.50-17 R	6	2035gms ± 7%	66	42P	45	310
Cheetah Rear	3.00-17 R	6	2670gms ± 7%	84	45P	32	220
Classic	50/100-17	4	1265gms ± 7%	50	23J	33	230
Cruiser	70/90-17 R	6	2270gms ± 7%	70	40P	40	275
Cruiser	90/90-17 R	6	3030gms ± 7%	90	50P	40	275
Dolphin	120/70-17 TL	6	4550gms ± 7%	120	58H	41	280
Dolphin	160/60-17	6	6550gms ± 7%	160	69H	41	280
Dragon HD	2.50-17	8	2160gms ± 7%	65	48P	40	275
Dura Grip	3.00-17 TT	6	3410gms ± 7%	82	50P	40	275
Euro HD	2.50-17	8	2040gms ± 7%	65	48P	40	275
Fighter HD	2.50-17	8	2255gms ± 7%	65	48P	40	275
Flash	3.00-17 TL	6	3530gms ± 7%	82	50P	40	280
Grand HD	2.50-17	8	2305gms ± 7%	65	48P	40	275
Gripper	2.50-17	6	2140gms ± 7%	66	43P	40	275
Gripper	3.00-17	6	2945gms ± 7%	84	40P	40	275
Hi Grip +	3.00-17 TT	6	3465gms ± 7%	82	50P	40	275
Hi Speed	2.25-17 F	6	1610gms ± 7%	62	33L	40	275
Hi Speed	2.50-17 R	6	1985gms ± 7%	66	43P	40	275
Hi Speed	3.00-17 R	6	2770gms ± 7%	84	50P	40	275
Instinct	100/80-17 TL	6	3530gms ± 7%	100	52P	33	225
Instinct	130/70-17 TL	6	4880gms ± 7%	130	62P	36	250
Loader	2.50-17	8	2350gms ± 7%	65	43P	40	280
Loader	3.00-17	8	3255gms ± 7%	80	50P	40	280
Longlife Front 4	2.25-17 F	4	1515gms ± 7%	62	32L	32	220
Longlife Front 4	2.50-17 F	4	1750gms ± 7%	66	38L	32	220
Longlife Rear 2	3.00-17 R	6	2715gms ± 7%	82	50P	40	275
Longlife Rear 4	2.25-17 R	4	1515gms ± 7%	62	33L	32	220
Longlife Rear 4	2.50-17 R	4	1745gms ± 7%	66	38L	32	220
Longlife Rear 4	2.75-17 R	6	2270gms ± 7%	76	42P	32	220
Marathon	2.25-17	6	1605gms ± 7%	62	38L	32	220
Nitro	70/90-17	6	1950gms ± 7%	70	38P	33	225
Nitro 1	70/90-17 TL	6	2344gms ± 7%	70	38P	33	225

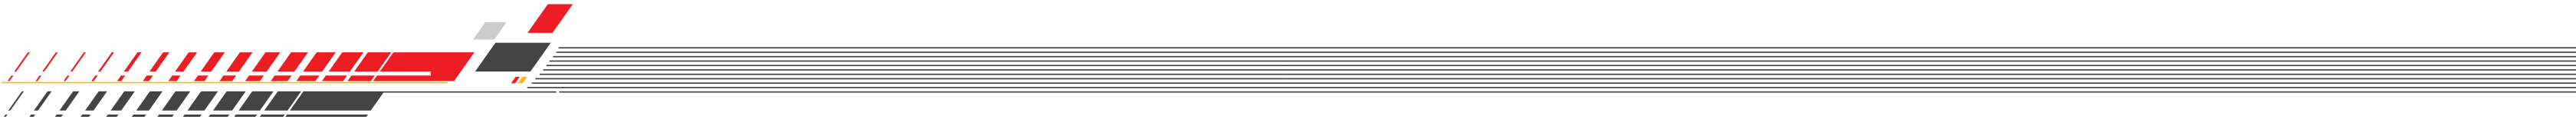



75

MOTORCYCLE TYRES				RIM SIZE 17"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Nitro 1	2.50-17	8	2250gms ± 7%	64	48P	40	275
Nitro 1	100/90-17	6	4100gms ± 7%	100	55P	33	225
Nitro 1	100/90-17 TL	6	4342gms ± 7%	100	55P	33	225
Nitro 1	70/90-17 TL	6	2344gms ± 7%	70	38P	33	225
Nitro 2	80/90-17 TL	6	2880gms ± 7%	80	38P	33	225
Nitro 2	70/90-17	6	2150gms ± 7%	70	38P	33	225
Nitro 2	70/90-17 TL	6	2450gms ± 7%	70	38P	33	225
Nitro 3	110/70-17	6	3415gms ± 7%	110	54S	36	250
Ravo	2.25-17	6	1655gms ± 7%	62	33 L	33	225
Ravo	2.50-17	6	2265gms ± 7%	66	42 P	45	310
Ravo	2.75-17	6	2685gms ± 7%	76	47 P	40	280
Ravo	3.00-17	6	2929gms ± 7%	82	50P	40	250
Ravo	110/90-17	6	4390gms ± 7%	110	60 P	36	250
Ravo	80/100-17	6	3180gms ± 7%	80	55 P	40	280
Ravo +	80/90-17 TL	6	2880gms ± 7%	80	44P	33	225
Ravo +	90/90-17 TL	6	3432gms ± 7%	90	49P	33	225
Ride On	90/90-17 TL	6	3770gms ± 7%	90	49P	33	225
Road Grip	2 1/4-17 TT	4	1455gms ± 7%	52	39B	40	275
Runner	2.50-17 TL	6	2654gms ± 7%	66	43P	41	280
Runner	90/80-17 TL	6	3120gms ± 7%	90	46P	36	250
Runner	90/90-17 TL	6	3257gms ± 7%	90	49P	36	250
Runner	100/80-17 TL	6	3580gms ± 7%	100	52P	36	250
Runner	110/70-17 TL	6	4152gms ± 7%	110	54P	36	250
Runner	110/80-17 TL	6	4260gms ± 7%	110	57P	36	250
Runner	140/70-17 TL	6	5490gms ± 7%	140	66P	36	250
Runner	130/70-17 TL	6	4985gms ± 7%	130	62 S	36	250
Runner	120/70-17 TL	6	4246gms ± 7%	120	58 S	36	250
Saver	2.50-17 R	6	2130gms ± 7%	66	45L	40	275
Speedo	3.00-17 TL	6	3090gms ± 7%	80	50P	40	280
Super Sonic	2.50-17 R	6	2130gms ± 7%	66	43P	40	275
Super Sonic	130/80-17 TL	6	5960gms ± 7%	130	65S	33	230
Super Trail	2.50-17	6	2045gms ± 7%	66	45P	45	310
Super Trail	3.00-17	6	2645gms ± 7%	84	50P	32	220
Top Gear	120/70-17 TL	6	4665gms ± 7%	120	58P	33	230
Top Gear	130/70-17 TL	6	4765gms ± 7%	130	62P	36	250
Turbo +	2.75-17 TL	6	3135gms ± 7%	76	47P	40	280



76

MOTORCYCLE TYRES				RIM SIZE 17"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Vigo	2.50-17 R	6	2140gms ± 7%	66	43P	40	275
Vigo	3.00-17 R	6	2945gms ± 7%	84	50P	40	275
Vogue	140/60-17 TL	6	5545gms ± 7%	140	63S	41	280
Vogue	110/70-17 TL	6	3550gms ± 7%	110	54S	36	250
Winner	2.50-17 R	6	2140gms ± 7%	66	43P	40	275
Winner	2.75-17 TL	6	2960gms ± 7%	76	41P	33	225
Winner	3.00-17 R	6	2945gms ± 7%	84	50P	40	275

MOTORCYCLE TYRES				RIM SIZE 18"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Ace	2.75-18 TL	6	3099gms ± 7%	76	48P	41	280
Ace	90/90-18 TL	6	3770gms ± 7%	90	51P	33	225
Ace	110/80-18 TL	6	4330gms ± 7%	110	58S	41	280
Ace	120/80-18 TL	6	5580gms ± 7%	120	62S	33	225
Alpha	2.75-18 TL	6	3035gms ± 7%	76	48P	40	280
Alpha	3.00-18 TL	6	3710gms ± 7%	82	52P	40	280
Alpha	90/90-18 TL	6	3710gms ± 7%	90	51P	33	235
Battle Max	110/100-18	6	5897gms ± 7%	110	64M	32	225
Battle Max	3.00-18 TL	6	3523gms ± 7%	82	52P	32	225
Charger M+S	2.75-18 TL	6	3305gms ± 7%	80	48P	36	280
Charger M+S	90/90-18 TL	6	3695gms ± 7%	90	57P	40	280
Cheetah Front	2.50-18 F	6	1845gms ± 7%	66	48P	45	310
Cheetah Front	2.75-18 F	6	2325gms ± 7%	76	42P	33	227
Cheetah Rear	2.50-18 R	6	2115gms ± 7%	66	48P	45	310
Cheetah Rear	2.75-18 R	6	2405gms ± 7%	76	50P	50	345
Cheetah Rear	3.00-18 R	6	2811gms ± 7%	82	52P	40	276
Cobra	90/90-18 TL	6	3710gms ± 7%	90	51P	33	225
Classic	4.00-18 TT	4	5355gms ± 7%	109	60P	33	225
Cruiser	70/90-18 R	6	2455gms ± 7%	70	40P	40	275
Cruiser	90/90-18 R	6	3480gms ± 7%	90	51S	35	241
Cruiser New	100/90-18	6	4320gms ± 7%	100	56P	33	225
Drifter	3.50-18 TL	6	4540gms ± 7%	95	56P	33	230
Dura Grip	3.00-18 TT	6	3185gms ± 7%	82	50P	40	280
Dura Grip	3.00-18 TL	6	3605gms ± 7%	80	52P	41	280
Dura Grip	3.25-18 TL	6	4045gms ± 7%	90	59P	41	280



77

MOTORCYCLE TYRES				RIM SIZE 18"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Dura Grip	3.50-18 TL	6	4595gms ± 7%	93	62P	41	280
Flash	3.00-18	6	3835gms ± 7%	82	52P	40	280
Gripper	3.00-18	6	3295gms ± 7%	84	51P	35	240
Hi Speed	2.50-18 R	6	1970gms ± 7%	66	45P	40	275
Insignia	3.50-18 TL	6	4760gms ± 7%	94	56P	33	225
Loader	2.50-18	8	2485gms ± 7%	65	45P	45	300
Longlife	3.00-18 R	6	2715gms ± 7%	82	50P	35	240
Longlife +	2.75-18 TL	6	2980gms ± 7%	78	42P	33	225
Longlife Front	2.75-18 F	6	2405gms ± 7%	76	42P	33	230
Longlife Front 4	2.50-18 F	4	1825gms ± 7%	66	38P	32	220
Longlife Rear 4	2.50-18 R	4	1825gms ± 7%	66	48P	32	220
Marathon	2.75-18	6	2955gms ± 7%	76	48P	41	280
Marathon	90/90-18	6	3482gms ± 7%	90	57P	41	280
Mate	4.10-18 TT	4	4740gms ± 7%	109	60P	33	225
Motocross	4.10-18 TL	6	4360gms ± 7%	109	60P	33	225
Nitro	90/90-18	6	3480gms ± 7%	90	51P	36	250
Nitro 1	2.50-18 TL	6	2525gms ± 7%	66	45P	33	225
Nitro 1	100/90-18 TL	6	4630gms ± 7%	100	56P	33	230
Nitro 1	90/90-18 TL	6	4000gms ± 7%	90	51P	33	225
Nitro 1	110/90-18 TL	6	5255gms ± 7%	110	59P	33	225
Rapid	2.75-18 TL	6	3135gms ± 7%	76	48P	41	280
Rapid	3.00-18 TL	6	4068gms ± 7%	82	52P	41	280
Ravo	90/90-18 TL	6	3770gms ± 7%	90	51P	33	225
Ravo	2.50-18	6	2375gms ± 7%	66	42P	45	310
Ravo	2.75-18	6	2765gms ± 7%	76	48P	40	280
Ravo	3.00-18	6	3090gms ± 7%	82	52P	40	280
Ravo +	2.75-18 TL	6	3655gms ± 7%	82	42P	33	225
Ravo +	3.00-18 TL	6	3785gms ± 7%	82	52P	33	225
Rover	3.00-18 TL	6	3350gms ± 7%	82	52P	41	283
Runner	90/90-18 TL	6	4000gms ± 7%	90	51P	33	225
Runner	100/90-18 TL	6	4500gms ± 7%	100	51P	33	230
Runner	2.75-18 TL	6	3100gms ± 7%	76	48P	41	280
Speedo	2.75-18 TL	6	2760gms ± 7%	78	48P	41	283
Speedo	3.00-18 TL	6	3315gms ± 7%	80	52P	41	280
Storm	3.00-18 TL	6	3890gms ± 7%	82	52P	33	225



78

MOTORCYCLE TYRES				RIM SIZE 18"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Super Trail	2.50-18	6	2190gms ± 7%	66	45P	45	310
Turbo	2.50-18 F	6	2115gms ± 7%	66	45P	41	280
Turbo	2.75-18 F	6	3215gms ± 7%	76	44P	32	221
Vista	90/90-18 TL	6	3450gms ± 7%	90	51P	33	228

MOTORCYCLE TYRES				RIM SIZE 19"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Ace	90/90-19 TL	6	4341gms ± 7%	90	52P	33	225
Mate	3.60-19 TT	4	4098gms ± 7%	93	57P	36	250
Motocross	3.25-19 TL	6	4055gms ± 7%	89	54S	33	225
Motocross	3.25-19 TT	6	3645gms ± 7%	89	54S	33	225
Motocross	3.50-19 TL	6	4945gms ± 7%	94	57S	36	250
Motocross	3.50-19 TT	6	4535gms ± 7%	94	57S	36	250

MOTORCYCLE TYRES				RIM SIZE 21"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Ace	80/90-21 TL	6	3516gms ± 7%	80	48 H	41	280
Motocross	2.75-21 TL	6	3710gms ± 7%	76	45 P	33	225



SCOOTER TYRES				RIM SIZE 8"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
LL-Scooter	3.50-8	6	2000gms ± 7%	93	51 J	35	242

SCOOTER TYRES				RIM SIZE 10"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Charger M+S	3.50-10 TL	6	2550gms ± 7%	94	59J	47	325
Gravity	3.00-10 TL	6	1940gms ± 7%	82	44J	36	250
LL-Scooter	3.50-10	6	2185gms ± 7%	93	51J	35	242
LL-XP	3.50-10 XP	6	2375gms ± 7%	94	51J	36	250
Navigator	3.50-10	6	2405gms ± 7%	94	51J	36	250
Navigator	3.50-10 TL	6	2650gms ± 7%	94	51J	36	250
Nitro HD	90/100-10 TL	6	2605gms ± 7%	90	53J	36	250
Nitro HD	3.50-10 TL	6	2605gms ± 7%	94	53J	36	250
Pride	80/90-10 TL	6	1968gms ± 7%	80	44J	36	250
Racer	3.00-10 TL	6	1992gms ± 7%	80	44J	36	250
Racer	3.50-10 TL	6	2658gms ± 7%	92	51J	36	250
Ritz	100/90-10 TL	6	2925gms ± 7%	100	56J	36	250
Spike	3.50-10 TL	6	2360gms ± 7%	94	51J	36	250
Ultima	120/70-10 TL	6	2895gms ± 7%	120	48J	32	220
Ultima	100/80-10 TL	6	2585gms ± 7%	100	53J	36	248
Zapper	3.50-10 TL	6	2405gms ± 7%	94	51J	36	250

SCOOTER TYRES				RIM SIZE 12"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Charger M+S	90/90-12 TL	6	2650gms ± 7%	90	54J	36	250
Eternity	130/70-12 TL	6	3810gms ± 7%	130	56L	33	230
Friction	120/70-12 TL	6	3400gms ± 7%	120	51L	33	230
Instinct	120/70-12 TL	6	3620gms ± 7%	120	51L	33	230
Instinct	130/70-12 TL	6	3720gms ± 7%	130	56L	33	230
Octavo	90/90-12 TL	6	2735gms ± 7%	90	44J	25	175
Ritz	90/90-12 TL	6	2735gms ± 7%	90	44J	25	175
Stallion	120/70-12 TL	6	2805gms ± 7%	120	51L	33	230
Stallion	130/70-12 TL	6	3400gms ± 7%	130	56L	33	230
Thunder	130/70-12 TL	6	3610gms ± 7%	130	62P	40	280
Ultima	120/70-12 TL	6	3265gms ± 7%	120	51J	33	225
Vigour	120/70-12 TL	6	3360gms ± 7%	120	58P	40	280

SCOOTER TYRES				RIM SIZE 13"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
LL-XP	130/60-13 TL	4	3000gms ± 7%	130	53J	33	230
Tornado	110/70-13 TL	6	3347gms ± 7%	110	48P	33	230
Tornado	130/70-13 TL	6	4480gms ± 7%	130	57P	33	230



BICYCLE TYRES		RIM SIZE 12"
Tyre Name	Tyre Size	Weight / Tolerance
MTB Sports-001	12 x 3.00	640gms ± 7%
MTB Junior	12 x 1.75	450gms ± 7%

BICYCLE TYRES		RIM SIZE 16"
Tyre Name	Tyre Size	Weight / Tolerance
BMX	16 x 1.75	475gms ± 7%
BMX Longlife	16 x 1.75	475gms ± 7%
Fighter	16 x 1.95	460gms ± 7%
Flash	16 x 2.125	560gms ± 7%
Speed	16 x 1.75	500gms ± 7%
Tiger	16 x 1.95	570gms ± 7%
Zapper XP	16 x 1.75	560gms ± 7%

BICYCLE TYRES		RIM SIZE 20"
Tyre Name	Tyre Size	Weight / Tolerance
Blaze XP	20X2.125	830gms ± 7%
BMX	20 x 2.125	700gms ± 7%
Force	20 x 2.125	850gms ± 7%
Longlife	20 x 1 3/8	665gms ± 7%
MTB	20 x 2.125	825gms ± 7%
MTB Sports-002	20 x 3.00	1120gms ± 7%
MTB Sports-003	20 x 3.00	1240gms ± 7%
Sebak	20 x 3.00	1240gms ± 7%
Speed	20 x 2.125	827gms ± 7%
Throne	20 x 1.95	650gms ± 7%
Zapper XP	20 x 1.75	830gms ± 7%

BICYCLE TYRES		RIM SIZE 24"
Tyre Name	Tyre Size	Weight / Tolerance
BMX	24 x 2.125	950gms ± 7%
BMX Nylon	24 x 2.125	950gms ± 7%
Hawk	24 x 1.95	950gms ± 7%
Longlife	24 x 1 3/8	770gms ± 7%
Nitro	24 x 1.95	950gms ± 7%
Nitro XP	24 x 1.95	950gms ± 7%
Throne	24 x 1.95	800gms ± 7%
MTB -007	24 x 2.125	1000gms ± 7%

BICYCLE TYRES		RIM SIZE 26"
Tyre Name	Tyre Size	Weight / Tolerance
Alpha	26 x 1 1/2 x 1 3/4	920gms ± 7%
BMX	26 x 2.125	1070gms ± 7%
BMX Nylon	26 x 2.125	1070gms ± 7%
BYKO	26 x 2.0	1070gms ± 7%
Fast	26 x 1.75 x 2	920gms ± 7%
Fusion	26x1 1/2 x 2	930gms ± 7%
Force	26 x 1.95	1010gms ± 7%
Gallop	26 x 1.95	955gms ± 7%
Hawk	26 x 1.95	1073gms ± 7%
Jazz-XP	26 x 1.50	730gms ± 7%
Longlife	26 x 1 3/8	855gms ± 7%
MTB Sports-004	26 x 3.00	1800gms ± 7%
MTB-007	26 x 2.125	1180gms ± 7%
Navigator	26 x 2.125	1150gms ± 7%
Nitro	26 x 1.95	1070gms ± 7%
MTB Nylon	26 x 2.125	1225gms ± 7%
Nitro XP	26 x 1.95	1070gms ± 7%
Pace	26 x 2.125	1060gms ± 7%
Road Star	26 x 2.0	1075gms ± 7%
Thunder	26 x 1 3/8	855gms ± 7%
Vigo	26 x 1 1/2 x 1 3/4	920gms ± 7%

79

80



Bicycle TYRES

BICYCLE TYRES		RIM SIZE 27"
Tyre Name	Tyre Size	Weight / Tolerance
Bemisal	27 x 1 1/4	670gms ± 7%
Revolt	27 x 1 3/8	850gms ± 7%
Bravo	27.5 x 2.10	1100gms ± 7%

BICYCLE TYRES		RIM SIZE 28"
Tyre Name	Tyre Size	Weight / Tolerance
Admiral	28x1.5	1260gms ± 7%
Gripper	28 x 1.5	1070gms ± 7%
K2	28 x 1.75	1050gms ± 7%
Karachi Express 1	28 x 1.5	845gms ± 7%
Karachi Express 2	28 x 1.5	845gms ± 7%
Karachi Express 3	28 x 1.5	845gms ± 7%
Karachi Express 4	28 x 1.5	845gms ± 7%
Karachi Express 5	28 x 1.5	845gms ± 7%
Lahore Express 1	28 x 1.5	845gms ± 7%
Lahore Express 2	28 x 1.5	845gms ± 7%
Lahore Express 3	28 x 1.5	845gms ± 7%
Lahore Express 4	28 x 1.5	845gms ± 7%
Lahore Express 5	28 x 1.5	845gms ± 7%
Leader	28 x 1.5	1050gms ± 7%
Loader	28 x 1.5	1215gms ± 7%
Longlife Eco	28 x 1.5	880gms ± 7%
Longlife Yellow	28 x 1.5	995gms ± 7%
Paidar 4	28 x 1.5	920gms ± 7%
Racer Black	28 x 1.5	980gms ± 7%
Racer	28 x 1 1/2	980gms ± 7%
Ranger	28 x 1.5	1135gms ± 7%
Road Star 1	28 x 1.75	1080gms ± 7%
Sprint	28 x 1.75	980gms ± 7%
Sprint (Puncture Resistant)	28 x 1.75	1180gms ± 7%
Silver Star	28 x 1.5	925gms ± 7%
Winner	28 x 1.5	1070gms ± 7%
Force 1	700 x 35 C (28 x 15 1/8 x 13/8)	840gms ± 7%


BICYCLE TYRES		RIM SIZE 28"
Tyre Name	Tyre Size	Weight / Tolerance
Orbit (Puncture Proof)	37 - 622	736gms ± 7%
Orbit (Puncture Proof)	40 - 622	794gms ± 7%
Orbit (Puncture Proof)	47 - 622	883gms ± 7%
Tourer (Puncture Proof)	37 - 622	816gms ± 7%
Tourer (Puncture Proof)	40 - 622	874gms ± 7%
Tourer (Puncture Proof)	47 - 622	983gms ± 7%

BICYCLE TYRES		RIM SIZE 29"
Tyre Name	Tyre Size	Weight / Tolerance
Rhino	29 x 2.10	1160gms ± 7%
Zapper Plus	29 x 2.10	1065gms ± 7%

Rikshaw / Tuk Tuk TYRES

RICKSHAW TYRES				RIM SIZE 8"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Automiller	4.00-8	8	3000gms ± 7%	108	48E	44	300
Champion	4.00-8	10	3360gms ± 7%	108	54E	35	240
Cheetah	4.00-8	8	3225gms ± 7%	108	54E	35	240
Cheetah	4.00-8	10	3360gms ± 7%	108	54E	35	240
E-16	4.00-8	8	3000gms ± 7%	108	54E	35	240
Leader	4.00-8	10	3805gms ± 7%	110	76F	62	427
Longlife Front	4.00-8F	8	3115gms ± 7%	108	54E	35	240
Longlife Rear	4.00-8R	8	3115gms ± 7%	108	54E	35	240
Longlife XP	4.00-8R	8	3000gms ± 7%	108	76F	62	425
Nitro	4.00-8	10	3805gms ± 7%	110	76F	62	425
Racer	4.00-8	8	3000gms ± 7%	108	54E	35	240
Seal	4.00-8	8	3680gms ± 7%	108	76F	44	240
SRF	4.00-8	10	3805gms ± 7%	110	76F	62	425

RICKSHAW TYRES				RIM SIZE 10"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Champion RG	135-10	12	4585gms ± 7%	133	80F	65	450
Champion MG	135-10	12	4585gms ± 7%	133	80F	65	450
Longlife 1	135-10HP	10	4480gms ± 7%	132	80F	65	450
Vigo MG	5.00-10	10	4455gms ± 7%	142	80F	65	450
MA	4.50-10TT	12	4480gms ± 7%	120	80F	44	300

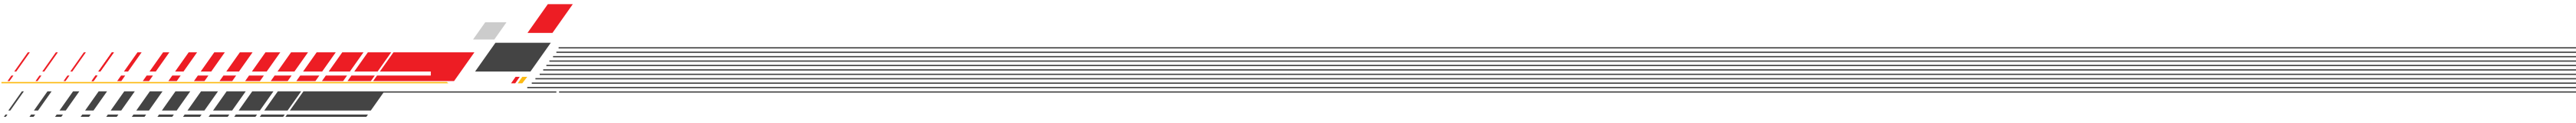



ULT / Loader

TYRES

83

ULT TYRES				RIM SIZE 12"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Champion 2	4.50-12	8	5800gms ± 7%	132	75J	58	400
Champion CG	4.50-12	10	5985gms ± 7%	132	75J	58	400
Champion CG	5.00-12	12	7050gms ± 7%	148	91J	80	550
Champion CG	5.00-12	8	6825gms ± 7%	150	81J	80	550
Champion DG	5.00-12	8	6825gms ± 7%	150	81J	80	550
Champion DG	5.00-12	12	7050gms ± 7%	148	91J	80	550
Fighter	4.50-12	10	6986gms ± 7%	132	75J	58	400
Loader	5.00-12	12	7048gms ± 7%	148	81J	58	400
Longlife	4.50-12	6	5165gms ± 7%	132	75J	58	400
Longlife	4.50-12	8	6120gms ± 7%	132	77J	58	400
Turbo	4.50-12	8	5000gms ± 7%	120	71J	57	400
Turbo	5.00-12	8	5600gms ± 7%	145	81J	58	400
Vigo MG	5.00-12	14	8000gms ± 7%	148	91J	80	550
Zarang	4.50-12	8	4830gms ± 7%	120	91J	80	550


ULT TYRES				RIM SIZE 16"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Hollander (ND)	6.00-16	10	10.85kgs ± 7%	167	101 J	62	425

Trolley

TYRES

84

TROLLEY TYRES				RIM SIZE 8"			
Tyre Name	Tyre Size	PR	Weight / Tolerance	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Longlife	3.50-8	2	1575gms ± 7%	84	35A1	25	172
Longlife	3.50-8	4	1790gms ± 7%	84	35A1	25	172
Longlife	3.50-8	6	1830gms ± 7%	84	35A1	25	172
Longlife	3.00-8	2	1135gms ± 7%	78	26A1	30	210
Longlife	3.00-8	6	1355gms ± 7%	76	35A1	28	176
Longlife	4.80/4.00-8	2	1200gms ± 7%	89	26A1	25	173
Longlife TG	3.00-8	2	1455gms ± 7%	78	26A1	25	172
Longlife TG	3.50-8	4	1955gms ± 7%	94	26A1	25	172
Longlife TG	3.50-8	6	2025gms ± 7%	94	26A1	25	172
Paider	3.50-8	6	2190gms ± 7%	80	43A1	33	225
Prince	3.50-8	2	1590gms ± 7%	84	43A1	33	225
Ravo	4.00-8	6	2915gms ± 7%	106	43A1	33	225
Vigo	3.00-8	8	1510gms ± 7%	70	26A1	29	200
Winner	3.75-8	4	2190gms ± 7%	86	26A1	29	200
Wheel Barrow LL	3.50-8 JG	4	1785gms ± 7%	84	35A1	25	210
Wheel Barrow LL	3.50-8	4	1785gms ± 7%	84	35A1	25	172
Wheel Barrow LL	4.00-8	2	2025gms ± 7%	94	35A1	30	210
Wheel Barrow LL	4.00-8	6	2105gms ± 7%	94	35A1	30	210

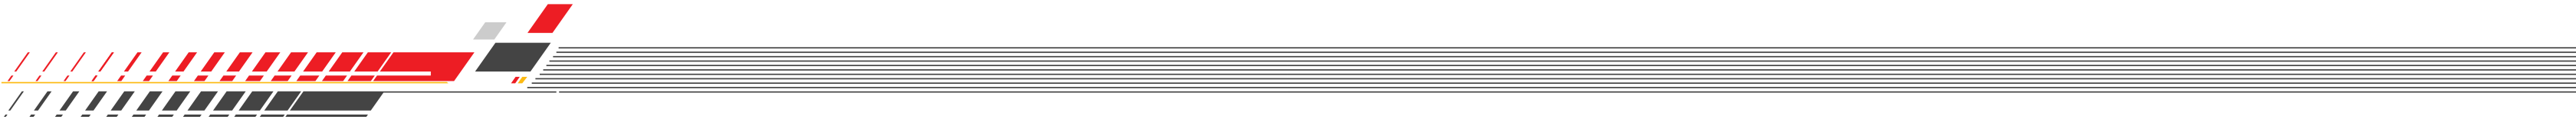




AGRI TYRES			RIM SIZE 16"			
Tyre Name	Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
LongLife CG (F)	6.00-16	10	174	88 A6	47	325
LongLife CG (F)	6.00-16	12	174	88 A6	47	325
LongLife CG (F)	7.50-16	10	210	103 A6	54	373
LongLife CG (F)	7.50-16	12	210	103 A6	54	373
LongLife (F)	6.00-16	6	174	88 A6	47	325
LongLife (F)	6.00-16	8	174	88 A6	47	325
LongLife (F)	6.00-16	10	174	88 A6	47	325
LongLife (F)	7.50-16	6	210	103 A6	54	373
LongLife (F)	7.50-16	8	210	103 A6	54	373
LongLife (F)	7.50-16	10	210	103 A6	54	373
LongLife (F)	7.50-16 BG	8	200	103 A6	54	370
LongLife (F)	7.50-16 BG	10	200	109 A6	68	469
LongLife (F)	7.50-16 BG	12	200	113 A6	70	485
LongLife (F)	7.50-16 BG	14	200	116 A6	75	520
King (F)	7.50-16	8	200	103 A6	54	370
Taara (F)	6.00-16	6	159	88 A6	50	340
Taara (F)	6.00-16	8	159	94 A6	65	450
Taara (F)	7.50-16	6	204	98 A6	41	280
Taara (F)	7.50-16	8	204	103 A6	54	370
Taara (F)	7.50-16	10	204	109 A6	69	475

AGRI TYRES			RIM SIZE 20"			
Tyre Name	Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
LongLife HD (F)	9.00-20 HD	10	215	118 A6	46	318
LongLife HD (F)	9.00-20 HD	12	215	120 A6	50	345
LongLife HD (F)	9.00-20 HD	14	215	122 A6	52	358
LongLife HD (F)	7.50-20	8	203	109 A6	54	370
LongLife HD (F)	7.50-20	10	203	112 A6	52	358
LongLife HD (F)	7.50-20	12	203	114 A6	55	379
LongLife HD (F)	7.50-20	14	203	115 A6	58	400
Puller (F)	11.2-20	8	260	116 A6	35	240



AGRI TYRES			RIM SIZE 24"			
Tyre Name	Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Puller (F)	12.4-24	8	311	117 A7	32	220
Leader	11.2-24	8	310	111 A6	35	240

AGRI TYRES			RIM SIZE 28"			
Tyre Name	Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
King	12.4-28	8	323	123 A6	33	230
King	12.4-28	12	323	131 A6	33	230
Champion	12.4-28	8	323	123 A6	33	230
Champion	12.4-28	12	323	131 A6	33	230
Champion	13.6-28	8	346	123 A6	28	190
Champion	13.6-28	12	346	130 A6	42	290
Champion	14.9-28	8	360	130 A6	32	220
Champion	14.9-28	12	360	138 A6	38	260
Hero	12.4-28	8	323	123 A6	33	230
Hero	12.4-28	12	323	131 A6	33	230
Rustam	14.9-28	8	360	130 A6	32	220
Rustam	14.9-28	12	360	138 A6	38	260
Zameendar (R)	12.4-28	6	327	117 A6	25	170
Zameendar (R)	12.4-28	8	327	123 A6	33	230
Zameendar (R)	12.4-28	10	327	124 A6	35	240
Zameendar (R)	12.4-28	12	327	125 A6	36	250
Zameendar (R)	13.6-28	6	350	121 A6	23	160
Zameendar (R)	13.6-28	8	350	125 A6	30	210
Zameendar (R)	13.6-28	10	350	127 A6	33	230
Zameendar (R)	13.6-28	12	350	128 A6	35	240
Zameendar (R)	14.9-28	6	368	121 A6	20	140
Zameendar (R)	14.9-28	8	368	126 A6	26	180
Zameendar (R)	14.9-28	10	368	130 A6	32	220
Zameendar (R)	14.9-28	12	368	134 A6	35	240

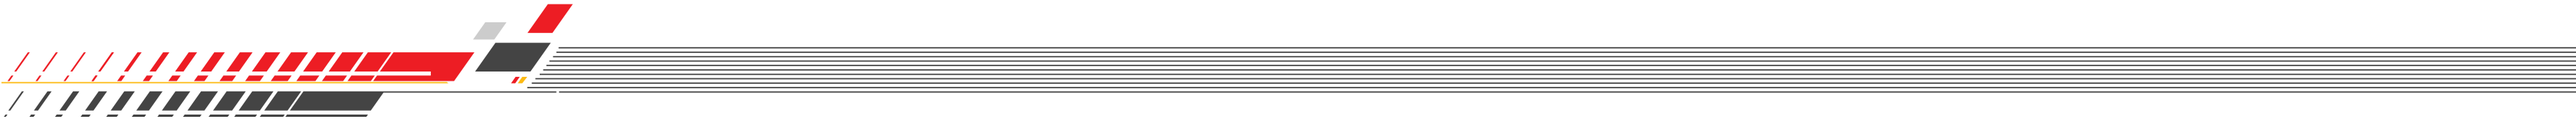




AGRI TYRES			RIM SIZE 30"			
Tyre Name	Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Gold	16.9-30	8	430	132 A8	24	170
Gold	16.9-30	14	430	144 A8	39	270
Gold	18.4-30	8	480	139 A8	20	140
Gold	18.4-30	14	480	147 A8	39	270
Champion	16.9-30	8	420	132 A8	24	170
Champion	16.9-30	14	420	144 A8	39	270
Champion	18.4-30	8	480	139 A8	20	140
Champion	18.4-30	14	480	147 A8	39	270
Zameendar (R)	16.9-30	6	426	126 A6	19	130
Zameendar (R)	16.9-30	8	426	132 A6	25	170
Zameendar (R)	16.9-30	10	426	136 A6	28	190
Zameendar (R)	16.9-30	12	426	140 A6	32	220
Zameendar (R)	18.4-30	6	474	130 A6	17	120
Zameendar (R)	18.4-30	8	474	135 A6	20	140
Zameendar (R)	18.4-30	10	474	140 A6	26	180
Zameendar (R)	18.4-30	12	474	145 A6	32	220

AGRI TYRES			RIM SIZE 38"			
Tyre Name	Tyre Size	PR	Sec-Width (mm)	Load / Speed Index	Max Pressure (PSI)	Max Pressure (kPa)
Hercules HD	15.5-38	12	365	139 A6	33	227
Hercules HD	15.5-38	14	365	142 A6	38	262
Hercules Plus	15.5-38	8	393	132 A6	24	165
Hercules Plus	15.5-38	10	393	136 A6	29	200
Hercules Plus	15.5-38	12	393	139 A6	33	227
Hercules Plus	15.5-38	14	393	142 A6	38	262



PAKISTAN'S GLOBAL TYRE BRAND

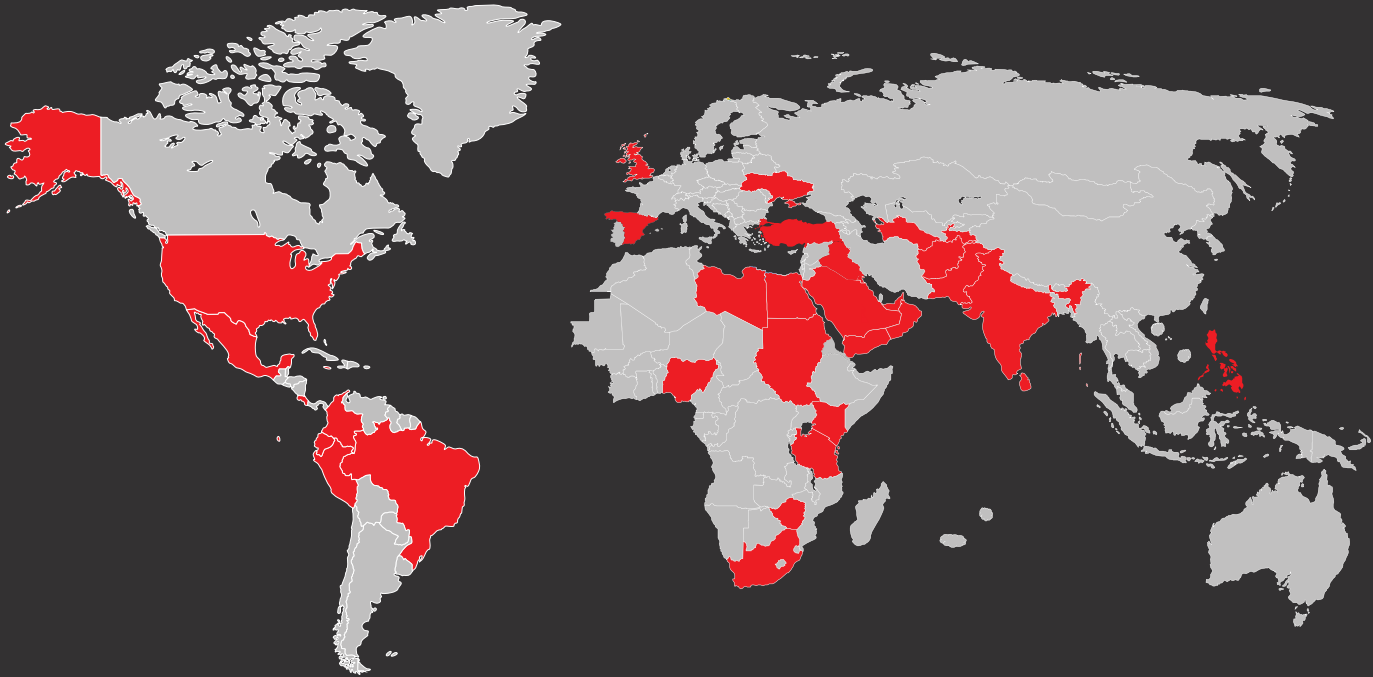

GEOGRAPHICAL PRESENCE

Our products are available in more than forty countries.

Afghanistan | Turkey | Egypt | Brazil | Syria | Iraq | UAE | Tanzania | Colombia | Nigeria | Peru | Philippines | Greece | Sudan | Turkmenistan
Ecuador | Jordan | Ukraine | UK | Venezuela | Vietnam | Tunisia | El Salvador | France | Yemen | Uruguay | Somalia | Honduras | Guatemala
The Netherlands | Zimbabwe | Bulgaria | Romania | Portugal | Mexico | Nicaragua | Slovenia | Sri Lanka | India | Kenya | Spain | KSA | USA
Jamaica | South Africa | Costa Rica